

THE COMPLETE PRODUCT RANGE FROM THE LEADERS IN EXTERIOR LIGHTING

**EXTERIOR LIGHTING** 

**OUR PROFILE** 

# LIGHTING THE WORLD BEYOND EXPECTATION



At Abacus we've succeeded in developing and supplying superior products for our customers in the high performance exterior lighting sector. Customers who demand energy efficient, attractive areas in which their own customers can feel comfortable and secure.

Many of our products incorporate patented high performance reflectors, recognised as delivering specified lighting levels which minimise energy outlay and project costs while providing uniformities second to none.

For over 60 years Abacus has focused its business on meeting its customers' needs, providing a design service of which we are justly proud. ISO certified for quality and environmental management, we offer an unrivalled, complete package of manufacture, supply, installation and maintenance.

Find out more about our lighting products and services online.

www.abacuslighting.com











# **PRODUCT GUIDE**



# Car park & amenity lighting

LED QUARTZ® BOLLARD AL9000	6
ORION LED AL4500	10
ORIS LED AL3710	14
<b>U-LUM</b> AL60300	16
PATHSEEKER 2 AL3150	18
CARICO AL22500	19
VETTA AL22000	20
REVATI AI 6061	22



# **Architectural lighting**

LIGO ROUND AL11200	26
PESCARA AL21700	27
<b>LENA</b> AL22200	28
RADA AL22300	29
<b>LEVATA</b> BOLLARD AL21800	30
LEVATA WALL AL21800	34
ADARA UPLIGHT/DOWNLIGHT AL11400	36
ADARA DOWNLIGHT AL11400	37



# **Industrial lighting**

<b>H-LUM</b> AL60500	39
<b>Q-LUM</b> AL61200	42
ARDUO AL22700	44



## **Road lighting**

<b>E-LUM</b> AL62000	47
<b>S-LUM</b> AL61000	52
APOLLO LED AL6666	55
INDUS LED AL21000	56
INDUS CITY LED AL21000	58



# **Floodlighting**

AAA-LUX AL SERIES AL60-AL700	64
AAA-LUX AL SERIES AL360	66
AAA-LUX WS SERIES WS100-WS600	68
<b>AAA-LUX RS</b> WS1005-WS6005	71
AAA-LUX STAD	74
CHALLENGER® 1 AL6000 ===	79
CHALLENGER® 3 AL5900 ■	82
<b>VAGO</b> AL61100	85
<b>F-LUM</b> AL60900	88
F-LUM MIDI AL60700	90
F-LUM MINI AL60800	92
TRENT 2 LED AL5500	94
TRENT 2 LED DOUBLE ASYMMETRIC AL5500	97
MURA 2 LED AL5300	99
VELA AL7000	101



### Lighting guidelines

Guide to recommended levels for amenity and floodlighting 102



## **Columns & masts**

The advantages of base-hinged columns for your project 104



#### **Installation & maintenance**

Our team of experts is on hand to provide both installation 106 and ongoing maintenance support

# Our standards Use these icons to understand some of our key lighting features.



#### Low light pollution

This logo indicates a luminaire with ULOR of less than 2%.



This indicates the level of ingress against moisture or dust. The first digit shows you the dust protection, and the second the moisture protection.



Upward Light Output Ratio. The ULOR value shows the proportion of upward light produced from the luminaire.





#### IK rating

An international numeric classification for the degrees of protection provided by enclosures for electrical equipment against external mechanical impacts.

ABACUS - FIRST CHOICE FOR HIGH PERFORMANCE AMENITY LIGHTING


# CAR PARK & AMENITY LIGHTING

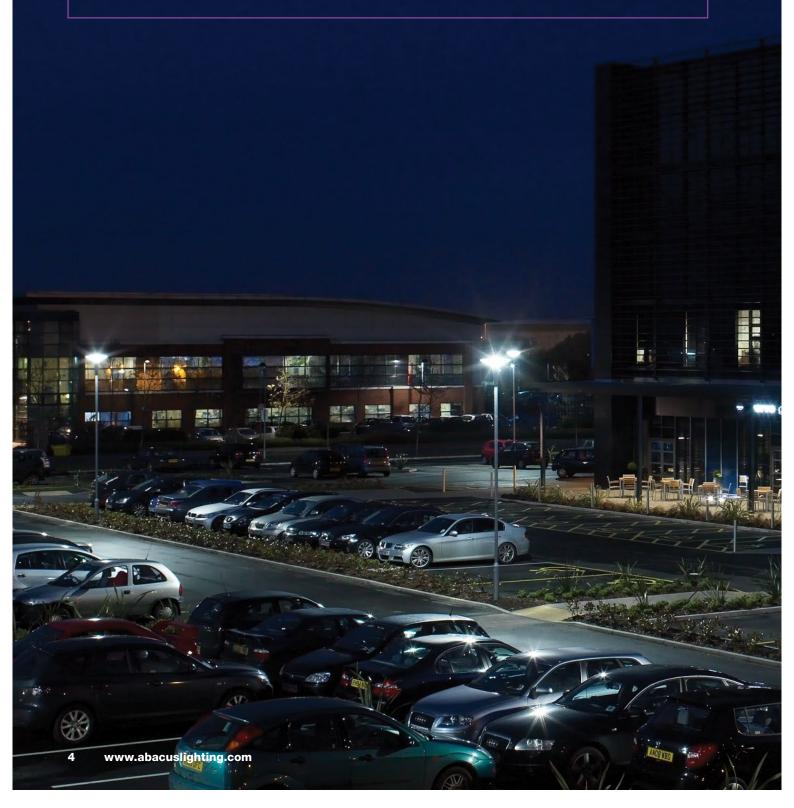

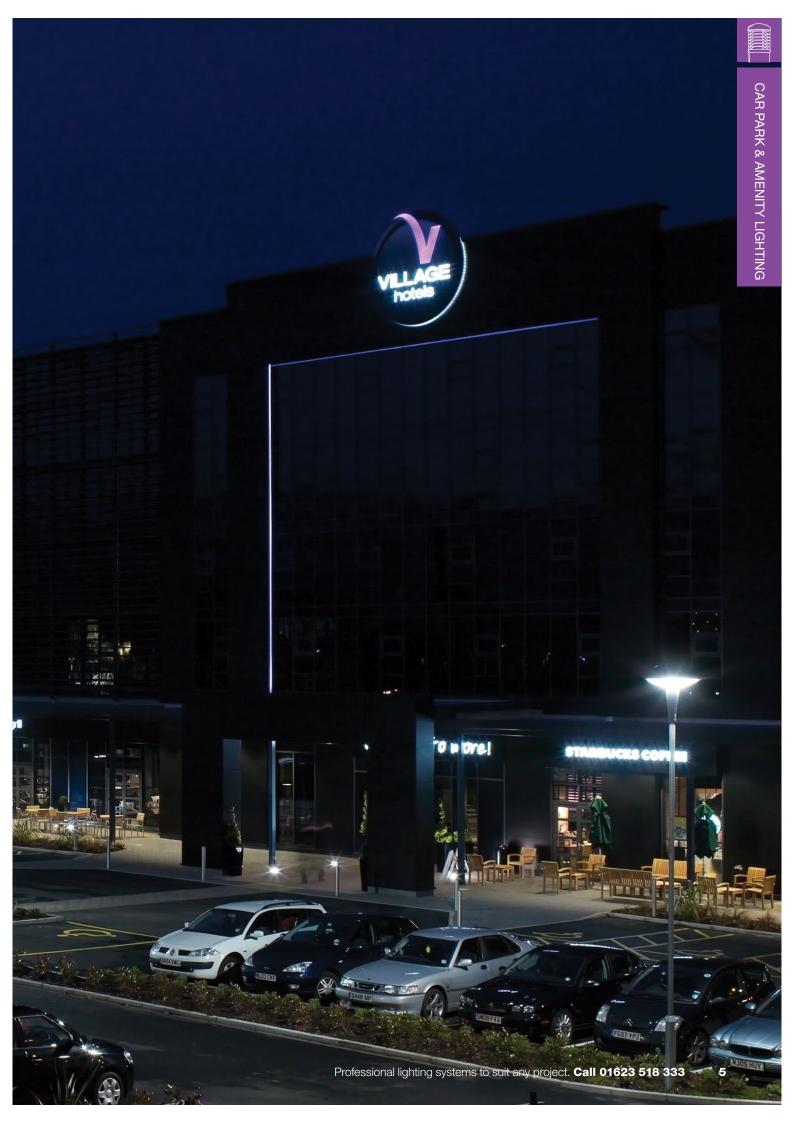

# LED QUARTZ BOLLARD

Bringing you the next generation in LED lighting technology...

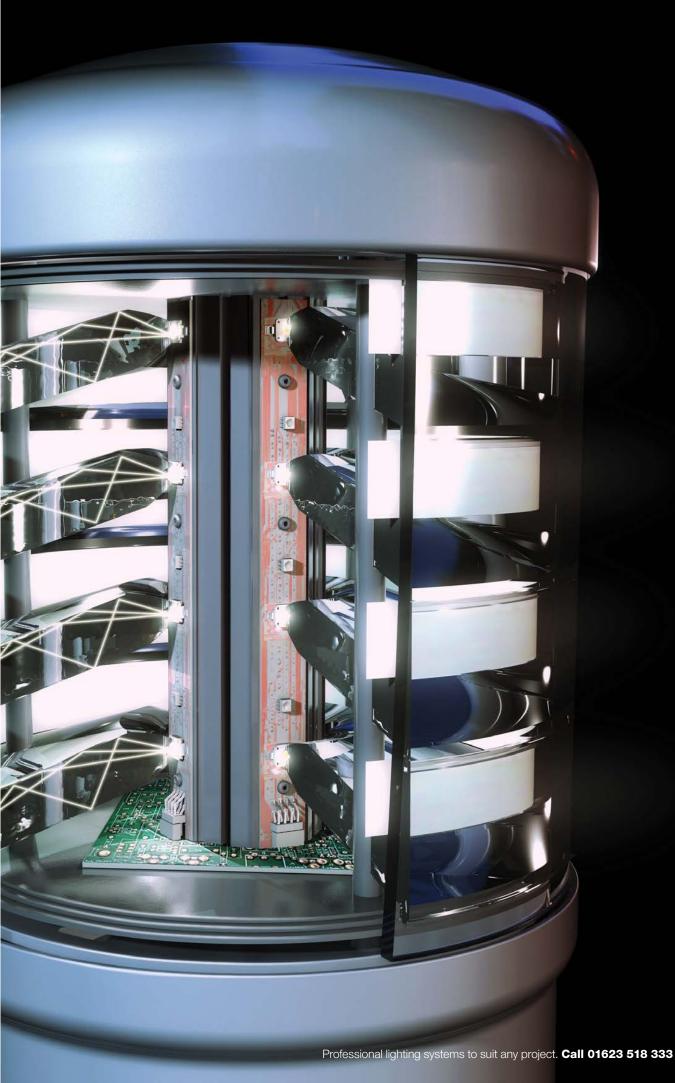

# LED QUARTZ BOLLARD AL9000









High performance, energy-saving technologies and flawless design: security lighting the Abacus way.

### **Energy-efficient**

In recent years LEDs have advanced significantly to become one of the most efficient, attractive and versatile forms of lighting around. For a start, LEDs use far less electricity than standard sources, producing a better quality of crisp, white light. And where a traditional bollard would emit only 28% of the light it produces, the AL9001 Quartz has a superior 90% efficiency - credentials that make it one of the most energy-efficient security lighting systems of its kind.

#### **Performance**

Combine instantaneous, bright white light with our patented louvre-based design and the result is simply exceptional: crisp, focused light in a variety of energy-efficient beam patterns, with virtually no light escaping upwards. The bollard itself is tough and robust, made from hardwearing steel tubing protected by a durable, polyester-based coating. Anti-vandal screws give even greater protection against shocks or vibrations. The LED louvres are behind a 5mm thick polycarbonate cylinder, preventing any direct vandalism. And perhaps most importantly, LEDs don't lose performance over time in the same way as conventional HID lamps. So much so, in fact, that they last at least four times longer.

#### **Economical and safe**

Fitted with LED technology, our Quartz Bollard can reduce wattage by a sizeable 60% - 80%, meaning you'll not only save money on energy

bills – there's less cabling needed to install them too. No UV and less heat produced makes them safe for pedestrian areas. Not to mention the fact that their longer lifespan puts them miles ahead of the competition in terms of maintenance and replacement costs.

#### **Visual effects**

Whether you're installing bollards to give clear, visual instructions, enhance mood, highlight architectural features or even support your branding, our unique red, green and blue colour effects will create drama – without interfering in any way with the more functional white light being given off. For added visual impact, we can even print your logo, advertising or directional arrows on the top louvre ring, as shown in the picture to the right.

#### **Features**

- Sturdy IP66 die-cast aluminium head unit with clear polycarbonate outer cylinder (UV stabilised)
- Tough bollard shaft made from heavy duty steel CHS tubing
- Black or silver textured polyester coating on bollard shaft and head-unit castings
- Louvred light controller, with LED light pumped into and through the acrylic louvres, producing a controlled light output
- Operational equipment housed in the bollard itself, using IP67 driver on a fully removable tray, with facility to loop in and loop out electric cabling
- · Emergency version available





## Specification

All LED Quartz bollards, regardless of main colour, louvre rings and beam type, have the same product code

#### - AL9000.

Individual requirements need to be specified when ordering – please see below for details. For emergency version, please enquire.

#### Beam patterns

Asymmetric

Symmetric

Axial

#### **Bollard colours**



RAL9005 Black



Fusion Silver 25









	Total Wattage (W)	Number of LEDs	Individual LED Wattage (W)	Distribution	Lumen Output (Im)	Colour Temp. (K)
AL9001	30	16	1.6	Symmetric	1976	4000
AL9002	30	16	1.6	Asymmetric	1976	4000
AL9003	30	16	1.6	Axial	1976	4000

# Beam patterns







Asymmetric Distribution AL9002



For mounting details see page 20

# FIRST CHOICE FOR RETAIL

#### THE NEXT STEP

Following Abacus's success with our specially designed Orion series, the Orion LED is the next step for effective and efficient car park lighting.

Using a similar design, the Orion LED produces a square distribution which reduces the number of lighting points needed, whilst the total energy consumption is also reduced with more energy efficient LEDs.

Influenced by the Orion family, the slender design subtly blends into the skyline with its white canopy and carefully placed LED modules which result in less than 1% upward light output ratio.

How can we help you today?

10

# ORION LED AL4500







#### **Benefits**


- Asymmetrical beam distribution ideal for boundary mounting location to reduce overspill and wasted light
- Symmetrical beam distribution ideal for wide column spacings whilst maintaining light uniformity

#### **Technical Features**

- IP66 rated
- · Available in symmetrical and asymmetrical beam distributions
- · Acrylic bowl and white polyester powder coated acrylic top canopy as standard
- 3mm thick aluminium LED mounting plate
- Die-cast aluminium top cap heat sink
- Die-cast aluminium spigot
- LEDs are covered by lenses with an outer bowl on the main fitting
- L70 Hrs >60000
- L80 Hrs >60000
- Running current 1000mA
- Less than 1% upward light output ratio



#### **Key features**

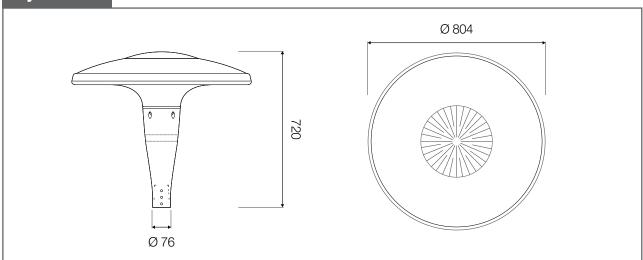


	Wattage (W)	Distribution	No. of LED Modules	Lumen Output (lm)	Power Factor	Luminous Efficacy (lm / W)	Running Current (mA)	No. of Drivers
AL4501	302	Symmetric	8	32036	0.994	106	1000	2
AL4502	231.6	Asymmetric	6	24795	0.989	107	1000	2
AL4503	153.8	Symmetric	4	16946	0.994	110	1000	1
AL4504	117	Asymmetric	3	12723	0.990	109	1000	1


### Orion LED distribution

Fitting	No. of Columns	No. of Luminaires	Mounting Height (m)	Average Lux Level (Lux)	Uniformity	Total Energy Consumption (W)	Power Density
Road Lantern	12	24	8	25.47	0.33	6.000	0.600W/m <sup>2</sup> /25 Lux
Orion LED	9	9	8	25.19	0.26	2.682	0.268W/m <sup>2</sup> /25 Lux

Using back-to-back road lanterns mounted at 8m to achieve 25 Lux average, total energy consumption is 6000 Watts

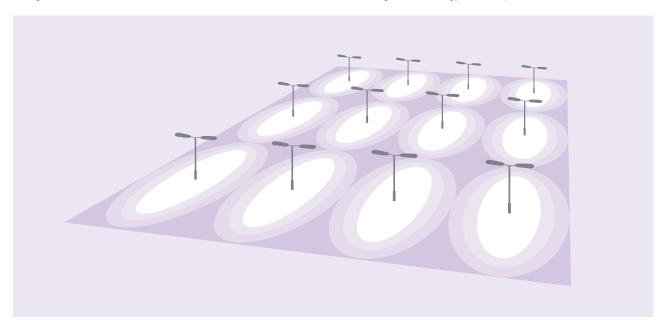

Using Orion LED mounted at 8m achieving 25 Lux average, total energy consumption drops to 2682 Watts

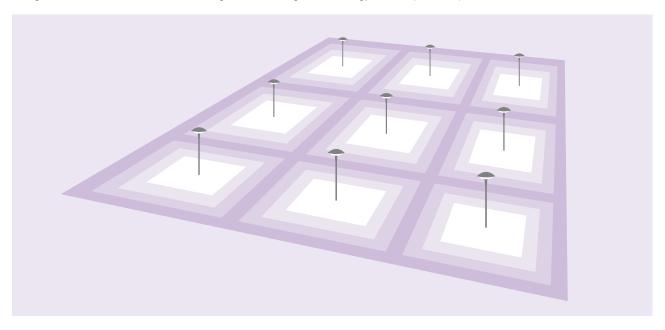


# **OPTIMUM REFLECTOR STORY**


#### Optimum Reflector System

This unique and patented reflector system was developed to provide high optical performance within a low profile body. The twin step reflector balances the light output between the areas below the lantern and the furthest areas away. Its unmatched uniformity and performance delivers economies on power, column and associated infrastructure costs.

The energy effectiveness of the Optimum Reflector System in comparison with standard reflector systems is clearly shown when the power density per unit illuminance level of an installation is measured. In examples below, we compare different systems based on a 100m x 100m area illuminated to 25 Lux from either 6m, 8m or 12m with a minimum uniformity of 0.25 Emin/Eave.



Shade Asymmetric version, with internal 120° shield to restrict overspill



Optimum Reflector System Upper Reflector Tier for


diffused reflection Lower Reflector Tier for main beam

#### **CONVENTIONAL REFLECTOR SYSTEMS**

9 x Lanterns at 12m: 1 x 400W SON-T

Cable lengths: 390m


Energy Consumption: 3.87kW Power Density: 0.36W/m²/25 Lux Columns/Foundation: 9



4 x Orion at 12m: 2 x 400W SON-T


Energy Consumption: 3.44kW Cable lengths: 260m

Power Density: 0.33W/m<sup>2</sup>/25 Lux Columns/Foundation: 4



18 x Twin Road Lanterns at 8m: 2 x 150W SON-T


Energy Consumption: 5.4kW Power Density: 0.50W/m<sup>2</sup>/25 Lux Cable lengths: 550m Columns/Foundation: 18



9 x Orion 2 at 8m: 400W SON-T

Energy Consumption: 3.87kW Cable lengths: 410m


Power Density: 0.36W/m<sup>2</sup>/25 Lux Columns/Foundation: 9



25 x Standard Reflectors at 6m: 250W SON-T

Energy Consumption: 6.9kW Cable lengths: 700m

Power Density: 0.84W/m<sup>2</sup>/25 Lux Columns/Foundation: 25



16 x Orion 3 at 6m: 250W SON-T

Energy Consumption: 4.14kW Cable lengths: 620m

Power Density: 0.38W/m<sup>2</sup>/25 Lux Columns/Foundation: 16

# ORIS LED AL3710





#### **Benefits**

- High performance amenity and road lighting with performance LED module
- Short install and maintenance time via tool-free opening hook
- Maintenance safety risks are reduced as power can be automatically switched off when the fitting is opened (available upon request)



### **Technical Features**

- Weight: 13 14kgWindage: 0.06m²
- CRI: 80
- Colour temperature: 4000K as standard. Other temperatures available upon request
- Controls: Presence detector or Dali
- Rated life: 50000 hours at 700mA
- Classes I and II available
- Mounting; Spigot side entry ø60mm Spigot post top ø60mm or ø76mm

- Six light distribution options available
- IP66 rated with IP68 vent
- IK08 as standard, option for IK10 available
- · Incorporated driver
- Thermal regulation by an integrated heat sink
- Surge protector or over/under voltage protection (optional)
- Luminaire made of injected cast aluminium

- Tempered glass
- ULOR 0% (ULOR: Upward Light Output Ratio)
- Extra slim profile fitting with curved design

#### **Applications**

Amenity

#### **Colours**

Grey

## **Distribution options**

The Oris LED is available in six light distribution options as seen in the following table.


Please enquire when quoting / ordering.

Light Distribution	Option	Description	Code
	ASY01	Main & secondary roads, high visual comfort & almost zero glare (very low TI)	А
Asymmetrical	ASY02	Normal to wide roads with adjacent channels (paths), wide spacing between light points	В
	ASY03	Narrow lanes, area to be lit targeted	С
Circular	CIR01	Atmospheric lighting of squares, car parks, town centres, pedestrian areas, parks & gardens	D
Symmetrical	SYM01	Atmospheric lighting of squares, car parks, town centres, pedestrian areas, etc. Axial installations (on median strips, on catenary systems, between pavement and bicycle path)	E
PC01	PC01	Completes lighting on protected crossings	F




	Wattage (W)	No. of LEDs	Lumen Output (lm)	Running Current (mA)	Luminous Efficacy	Windage (m²)	Weight (kg)
	48.2	45	5185	350	115	0.06	13
AL3712	70	45	6999	500	101	0.06	13
AL3712	99.4	45	9273	700	89	0.06	13
	151.3	45	12416	1050	73	0.06	13
	64.2	60	6913	350	114	0.06	13
AL3713	93.3	60	9332	500	99.7	0.06	13
AL3/13	132.5	60	12363	700	89.4	0.06	13
	201.7	60	16555	1050	71.6	0.06	14
	96.3	90	10370	350	117.2	0.06	13
	140	90	13998	500	100.3	0.06	13
AL3714	198.8	90	18545	700	90.6	0.06	14
	302.5	90	24833	1050	82.1	0.06	14

# **Dimensions**

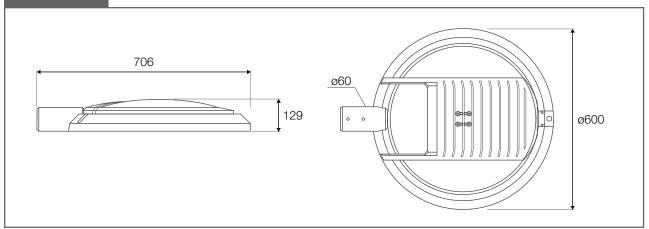

All dimensions are in mm.

# Key features

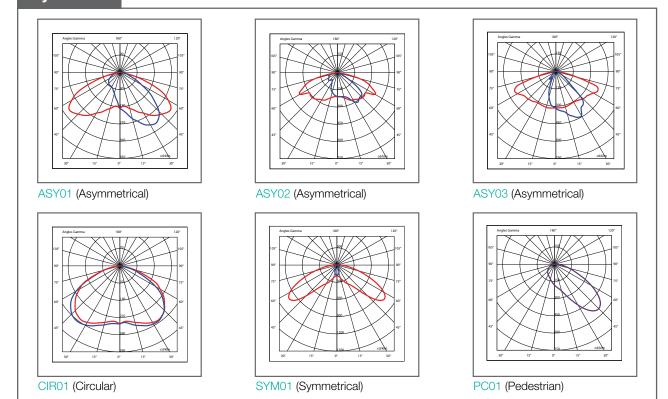

# **U-LUM** AL60300





The modern futuristic design of the U-LUM luminaire compliments the aesthetics of the city and integrates well in the urban environment. U-LUM LED light makes urban areas more appealing and inviting for people, while also saving energy, reducing your environmental impact and making these areas safe for children, pedestrians and cyclists.

#### **Benefits**


- Low maintenance
- Long lifetime
- Energy saving
- Smart driver
- Dimming options available

#### **Technical Features**

- Control: DALI or 1-10V
- Efficacy up to 113 lm/W
- CRI >80
- Colour temperature 4,000K (other upon request)
- Overload protection



## **Dimensions**

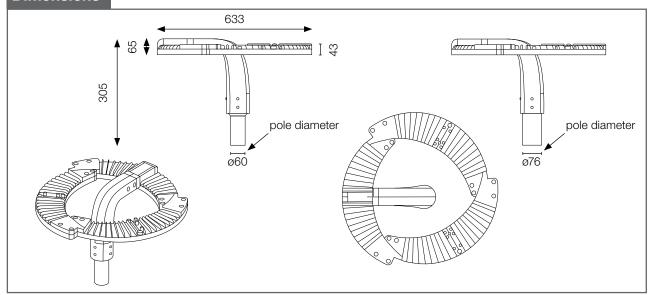


All dimensions are in mm.

	Wattage (W)	No. of LEDs	Luminous flux (lm)	Efficacy (lm/W)	Forward current (mA)	Luminaires per fuse	Appliance class	Additional options
AL60301	10	135	Up to 1130	Up to 113	20	< 50 pcs	Class I / Class II	PLC, RF, Bluetooth
AL60302	25	135	Up to 2830	Up to 113	30	< 21 pcs	Class I / Class II	PLC, RF, Bluetooth
AL60303	40	135	Up to 4520	Up to 113	50	< 21 pcs	Class I / Class II	PLC, RF, Bluetooth



	U-LUM
System efficacy (lm/W)	Up to 113
Supply voltage (VAC)	120-277
LED	135
Power (W)	10 - 40
Luminous flux (lm)	1,250 - 5,000
Power factor	> 0.97
EPA rating	0.248m²
Advisable installation height	Up to 6m
Weight (kg)	9
Lifetime L80B10	> 65,000 h
CCT	4,000K; other upon request
CRI	> 80
Ingress protection	IP66
Mechanical strength	IK09
Surge protection options	10 kV / 10 kA
Operating temperature	-40°c to +55°c
Electrical / Appliance class	Class I, Class II
Dimming levels	0 - 100%
Remote control options	Optional RF, PLC or Bluetooth
Colour	RAL 9011
Housing material	Aluminium
Mounting	Pole 60 mm, 76 mm (possible adapter use for other dimensions)
Warranty	5 years on electronics, 10 years on mechanical parts, upon request
Certificates	IEC 60598-1:2014 (8 edition); IEC 60598-2-3:2002 + A1:2011; EN 60598-1:2015; EN 60598-2-3:2003 + A1:2011; IEC/EN 62031:2008 + A1+A2; IEC/TR 62778:2014; CE, ENEC

# Photometry

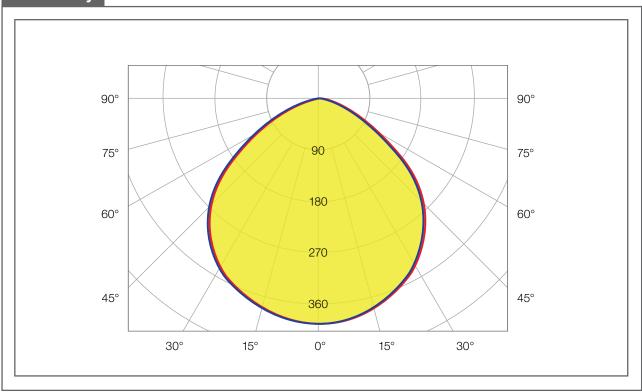

# PATHSEEKER 2 AL3150







#### **Benefits**

- Optional photocell available
- Tamper-resistant cover screws available
- Simple to fix using external stainless steel brackets and two lower points, all external to gasket line to preserve IP rating
- Complies with M.O.D. JSP482 Chapter 8 Document 4 'Category C' areas

#### **Features**

- Strong pressure die-cast LM24 aluminium body prevents distortion when fixing and preserves IP rating
- Textured black full polyester powder finish
- Spacings up to eight times mounting height


- Impact-resistant, flame retardant prismatic polycarbonate cover
- Supplied complete with lamp
- Emergency pack: contact Abacus sales for price and availability


#### Access

Internal access secured by screws in front panel



	Wattage (W)	Light Source	Description	Weight (kg)
AL3151	26	LED	Lamp and Integral Contol Gear	4.3





#### Photometric performance\*

3M mounting height 5M forward throw

Spacing	Initial illuminance	Uniformity (min:av)
12m	37 Lux av.	0.35
15m	30 Lux av.	0.30
18m	25 Lux av.	0.23
21m	22 Lux av.	0.20
24m	19 Lux av.	0.15

4M mounting height 6M forward throw

Spacing	Initial illuminance	Uniformity (min:av)
12m	28 Lux av.	0.42
15m	22 Lux av.	0.40
18m	18 Lux av.	0.30
21m	15 Lux av.	0.23
24m	13 Lux av.	0.18

Accessories	
AL3150PC	Photocell option

<sup>\*</sup> Performance based on conventional versions

CAR PARK & AMENITY LIGHTING

# CARICO AL22500



#### **Benefits**

• Internal drivers and electrics protected from the elements by the durable rated IP65 body

#### **Features**

- Power: LumaFit LED 33W (System wattage 36.6W)
- 115° optics
- Colour temperature 5000K as standard
- CRI: 85
- Array lumens: 4438lm
- Delivered lumens: 3114lm
- LumaFit LEDs on aluminium boards
- Dimmable driver

- Voltage 120 277V, 50/60Hz
- Die-cast aluminium back housing, finished in black powdercoating over a chromate conversion coat
- Cast-in template for ease of mounting over electrical boxing
- Colour matched hinged polycarbonate front housing with clear polycarbonate ribbed lens area
- 20mm coin plus with O-rings for conduit and photocell
- 5 year warranty
- Rated life: 50000 hours
- Operating temperature -40°C ~ + 40°C




- Direct mount of a 100mm recessed outlet box or using 20mm surface conduit
- Emergency version available


#### **Colours**



	Wattage (W)	Array Lumens (lm)	Delivered Lumens (lm)	Optic	CRI	Colour Temp. (K)	Colour
AL22501	36.6	4438	3114	115°	85	5000	Black

### **Key features**

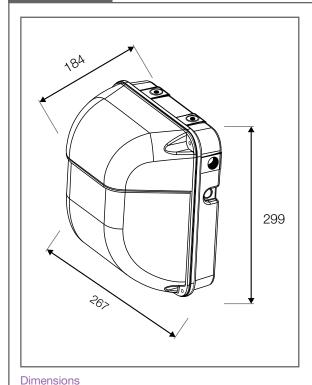

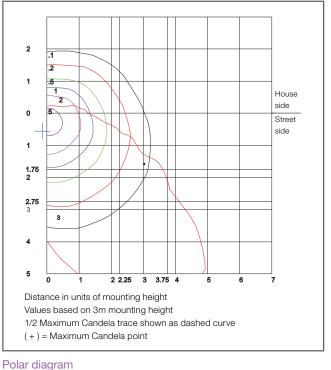

# VETTA AL22000







#### **Technical Features**

- Graphite full polyester powder finish
- Silver option available
- Strong die-cast LM2 aluminium body
- High efficiency prismatic polycarbonate or borosilicate glass front refractor (Glass cover IK06)
- Wide distribution (18W LED) or area distribution (32W LED) options
- Highly specular, multi-faceted injection moulded vacuum metallised reflector
- Excellent distribution with less than 2% upward light
- Optional photocell control
- Conventionally switched and Smart External versions available

# **Applications**

- Architectural
- Amenity

#### **Colours**



Black







	Wattage (W)	Colour Temp. (K) *	Distribution	Ra	Rated Life (h)	Driver Efficiency	Power Factor	LL/CW	IK Rating	Weight (kg)
AL22003	8	4000 / 5000	Wide	80	67000 L80/B10	>85	>0.95	120.0	IK10	3.8
AL22004	20, 34, 42	4000 / 5000	Area	70+	100000 L90/B10	>85	>0.95	127.6	IK10	3.9

For emergency version, please enquire when quoting / ordering. Additional 0.4kg to weights listed.

Smart External version is dimmable

Photocell (standard versions only) and tamper resistant screws (To fasten tamper resistant screws, order special screwdriver)


<sup>\*</sup> Please confirm colour temperature when quoting / ordering

#### Photometric performance

8W LED with polycarbonate cover


Spacing	Average illuminance (lux)	Uniformity (min:av)
3m mountin	g height - 3m forw	ard throw
10m ctrs	22	0.48
15m ctrs	15	0.47
20m ctrs	11	0.22
4m mountin	g height - 4m forw	ard throw
10m ctrs	17	0.48
15m ctrs	11	0.45
20m ctrs	8	0.47
5m mountin	ig height - 5m forw	ard throw
10m ctrs	13	0.42
15m ctrs	9	0.48
20m ctrs	7	0.45

Figures are based on initial lumens



e.g At 3m mounting height and 10m centres: 22 lux average horizontal illuminance at ground level

## **Key features**

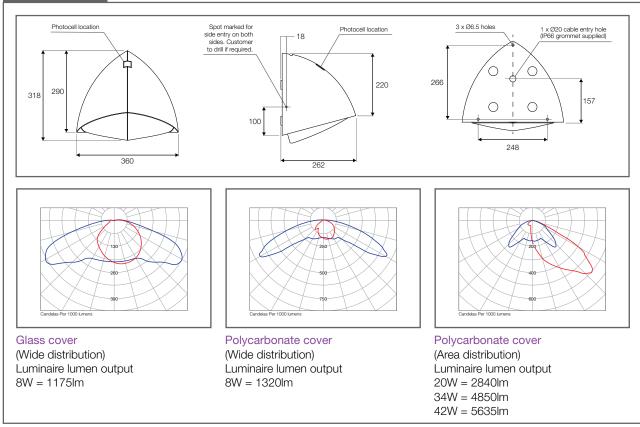

# **REVATI** AL60601



A compact full cutoff wall mounted luminaire available in two Wattages. With a specially designed wide forward throw optical distribution, it replaces an HID lighting system of up to 150W MH or HPS.

Typical applications include; rail, ports, warehouses, retail and amenity

Mounting heights between 3 - 8 metres can be used based on light level and uniformity requirements.

#### **Technical Features**

- Die cast aluminium housing with full cutoff front frame, integral heat sink and driver compartment.
- Twist-lock photocell / smart controls adaptable.
- Nickel-plated stainless steel hardware.
- Black (RAL 9005) powdercoat finish over a chromate conversion coating.
- Clear one-piece molded Type IV polycarbonate lens.
- Includes Easy-Hang wall mounting bracket with built-in level. Optional trim plate is available for use in retrofit applications to cover wall surface blemishes.
- Electronic driver, 120-277V, 50/60Hz; Power factor >0.90.
- Standard internal surge protection is 2kV for 25W, 6kV for 37W. 0-10V dimming as standard.



- CE: Listed for wet locations.
- IP66 sealed LED compartment.
- 5-year warranty.
- Designed to operate in -40°C to +50°C environment.
- CRI: 80
- CCT: 4,000K (standard) & 5,000K
- L90 (25°C ambient): >100,000 hours


#### **Applications**

- Amenity
- Retail
- Rail
- Ports
- Warehouse

#### **Colours**


Black

### **Dimensions**

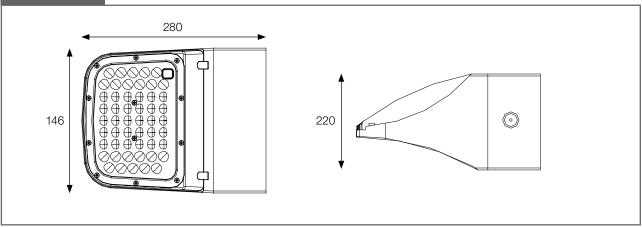



## **Photometry**

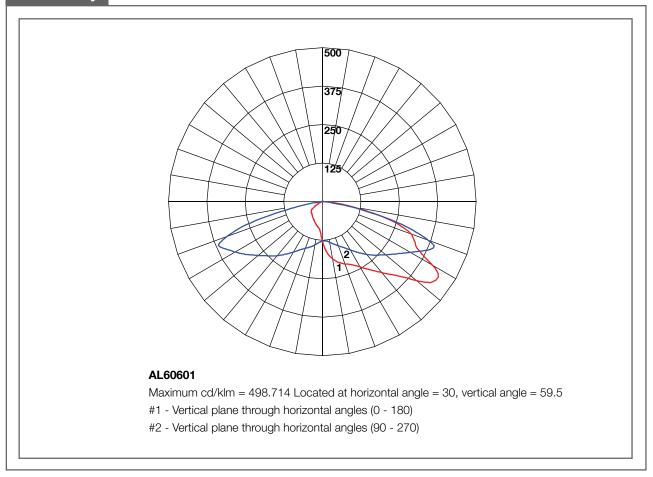


				4,000 CC	T 80 CRI	5,000 C0	CT 80 CRI
	Wattage (W)	Driver current (mA)	Optics	Lumen output	Llm/cW	Lumen output	Llm/cW
AL60601	28	525	Tupo IV	3,147	112	3,420	122
ALOUGUI	42	525	Type IV	4,454	106	4,599	110

### **Accessories**





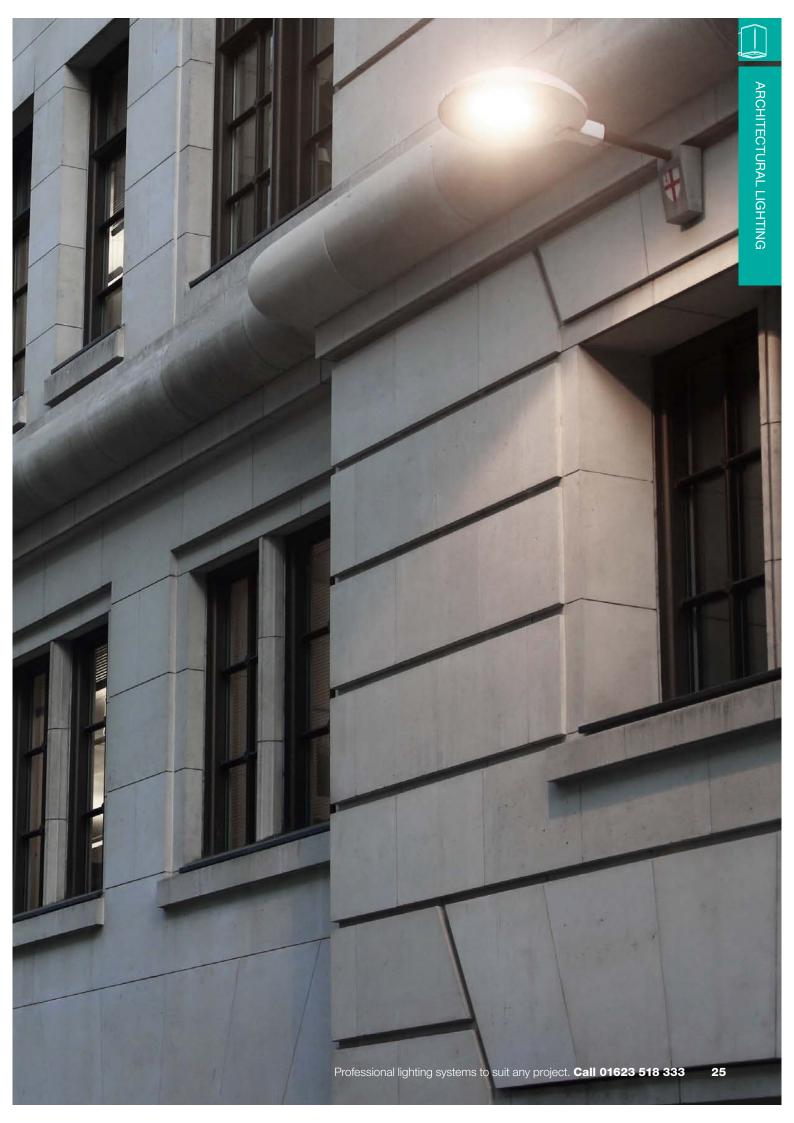

# **GO** AL11200 **ROUND**









- Luminaire housing has a high resistance to UV and is treated with highly antioxidant water-repellent lubricating solution to lengthen lifespan
- Strong luminaire body can withstand a maximum static pressure load 2500kg for use in high traffic areas
- · Stainless steel finish ideal for architectural use
- High efficiency thermoplastic with high vacuum deposit for heightened luminaire care
- Design allows for ease of maintenance

#### **Technical Features**

- In ground recessed uplighter
- · Non-integral driver

- Powder coated die-cast aluminium EN AB 44100 body with AISI 316L stainless steel trim
- Protective undercoating phosphochromate treatment
- Sealed to IP67
- Techno polymer Rough in Housing 017 / 018 / 019
- Soda-lime tempered glass 12mm
- · Silicon sealing gasket
- Supplied with pre-wired cable 0.5m long HO7RN8-F with brass cable gland M20 ø7 / 13mm
- Wire through connection available on request
- Drainage area 300mm
- Maximum static pressure load 2500kg



- Architectural
- In ground / surface recessed

#### **Beam Types**

- 14°
- 29°
- 62°


#### **Colours**

Stainless Steel

	Wattage (W)	Power Supply	No. of LEDs	Beam	Colour Temp. (K) **	Touch Temp. (°C)	Lumen Output (lm)	Fixture Colour	Rough Inground Casting Box	LED Driver
AL11201	18	Max 500mA 50/60HZ	1	14°	3000	<70	1957	Stainless	017	Non-integral *
AL11202	18	Max 500mA 50/60HZ	1	29°	3000	<70	1957	Stainless	018	Non-integral *
AL11203	18	Max 500mA 50/60HZ	1	62°	3000	<70	1957	Stainless	019	Non-integral *

<sup>\*\*</sup> Other colour temperatures available on request

#### **Key features**




4900 cd/k**l/** Polar Intensity Diagram

Luminaire: 18W 3000K Lamp: 1 LED

AL11201

Power: Max 500mA 50/60HZ



#### AL11202

Luminaire: 18W 3000K

Lamp: 1 LED

Power: Max 500mA 50/60HZ



#### AL11203

Luminaire: 18W 3000K

Lamp: 1 LED

Power: Max 500mA 50/60HZ

All dimensions are in mm.

<sup>\*</sup> Please enquire regarding drivers when requesting quotation and ordering.



# PESCARA AL21700



#### **Technical Features**

- Power: LED 50.5W (59W total power)
- Weight: 23.8kg
- Available in 2700K, 3000K, 4000K and 5000K colour temperatures
- Luminous flux (light source flux): 5808lm, 6060lm, 6648lm, 6754lm
- Available in two distribution options: Asymmetric and Batwing
- IP65 rated
- Protection Class I (IEC EN60593)
- CE, ENEC, RoHS certified
- ADC3 die-cast aluminium alloy light output ring and ight source frame
- Marine grade fiberglass top canopy with internal steel frame reinforcement
- Water vapour resistant silicone gasket

- Anti-corrosion pre-treatment then finished in an AKZO-NOBEL UV resistant polyester powder coat
- PMMA internal LED optical lens behind 4mm tempered glass 1090 anodized 1.2mm 99.85% purity aluminium reflector
- Input Voltage: AC220-240V
- Ambient temperature tested -40°C ~ +50°C
- Withstand wind speed 45m/s
- Service life ≥35000 hours
- For best results, use on columns up to 6m

### **Applications**

- Amenity
- Architectural










	Wattage (W)	Colour Temp. (K) *	Lumen Output (lm)	Distribution	Weight (kg)
	59	2700	5808	Asymmetric	23.8
AL21701	59	3000	6060	Asymmetric	23.8
ALZITOI	59	4000	6648	Asymmetric	23.8
	59	5600	6754	Asymmetric	23.8
	59	2700	5808	Batwing	23.8
AL21702	59	3000	6060	Batwing	23.8
ALZITUZ	59	4000	6648	Batwing	23.8
	59	5600	6754	Batwing	23.8

<sup>\*</sup> Please confirm colour temperature when quoting / ordering

#### **Key features**







#### ARCHITECTURAL LIGHTING

# LENA AL2220



#### **Benefits**

- Internal drivers and electrics protected from the elements by the durable rated IP65 body
- Blends into surroundings with two clean finishing options

#### **Features**

- Power: 16.9W
- Colour temperature 5000K as standard
- CRI: 83
- Array lumens: 2089lm • Delivered lumens: 1384lm
- IP65 rated
- Rated life: 50000 hours

- CE marked
- Electronic dimmable 1:10V (10%-100%)
- Inventronics IP65 driver 18W
- PCB board 15W
- Efficacy lumens per circuit watt: 122 L/CW at LED array, 81 L/CW
- Clear polycarbonate outer lens
- Medium beam spread
- Aluminium cone reflector
- Bollard available in stainless steel or black aluminium painted finished
- Cap available as dome or flat top
- Set into concrete and fixed with 8" anchor bolts

#### Colours





Stainless steel



• 5 year warranty	<i>a</i> 13	<ul> <li>Optional</li> </ul>	2.5kV surge prote	- 111			
	Wattage (W)	Colour Temp. (K)	Lumen Output (Im)	CRI	Dome / Flat Top	Colour	
AL22200 / SS	16.9	5000	1348	83	Dome top	Stainless steel	
AL22200 / BLK	16.9	5000	1348	83	Dome top	Black	
AL 22201 / DLK	16.0	5000	10/10	02	Elet top	Plack	

#### **Key features**





#### **ARCHITECTURAL LIGHTING**

# **RADA** AL22300



#### **Benefits**

- Ease of maintenance and upgrade via internal driver tray
- Internal drivers and electrics protected from the elements by the durable rated IP65 body

#### **Features**

- Power: 26W
- Colour temperature 4100K as standard
- CRI: 80+
- Delivered lumens: 2282lm
- IP65 rated
- Rated life: 50000 hours
- 5 year warranty

- Electronic driver 120-277V, 50/60Hz dimmable driver
- Internal driver tray
- Reflective white polycarbonate cone reflector
- Clear polycarbonate lens
- LED: 4 Chip-on-board
- Extruded aluminium housing, finished in a black powdercoat over a chromate conversion coating
- Flush mounting base and flat top
- Vandal-resistant screws
- Mounting kit with 200mm anchor bolts


#### Colour






	Wattage (W)	Delivered Lumens (lm)	No. of LED (Chip-on-board)	CRI	Colour Temp. (K)	Colour
AL22300	26	2282	4 COB	80+	4100	Black

#### **Key features**

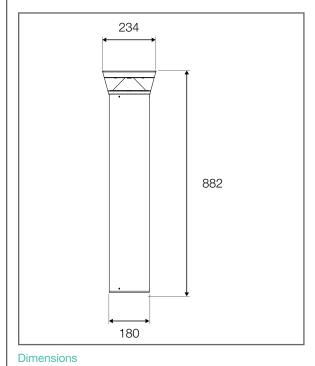

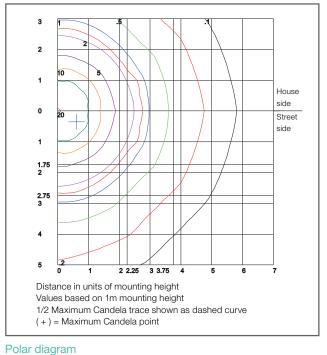

# LEVATA AL21800 BOLLARD



#### **Technical Features**

- Three wattage options: 7W, 14W or 25W
- Face shape options: square, round or oval
- Bollard height options: 500mm, 900mm or 1200mm
- Two possible light distributions: one way or two way (as specified in the product table)
- IP65 rated
- · Class I protection
- 6063 aluminium alloy post
- ADC3 die-cast aluminium alloy housing
- 1090 high purity aluminium reflector with filter hood light control
- Water vapour resistant silicone gasket
- Stainless steel fixings, allen headed screws
- Galvanised steel recessed frame
- Mechanical and chemical anti-corrosion pre-treatment, powder coated with 10 year normal UV protection
- Integrated electronic driver with thermal and overload protection
- Surge protection 4kV
- Waterproof cable at maximum ø10mm insert to luminaire
- Ambient temperature tested: -40°C ~ +50°C
- Matching wall versions available as part of the Levata LED family

#### **Applications**

Amenity

#### **Colours**







AL21801 AL21802



AL21805 AL21806 AL21807 AL21808



AL21803 AL21804




AL21809 AL21810 AL21811 AL21812



	Wattage (W)	No. of LEDs	Colour Temp. (K) *	Lumen Output (lm)	Input Voltage	Distribution	Face Shape	Total Height (mm)	Weight (kg)
	14	30	2700	1290	AC220-240V	2 Way	Rectangle	500	6.94
AL21801	14	30	3000	1560	AC220-240V	2 Way	Rectangle	500	6.94
AL21001	14	30	4000	1860	AC220-240V	2 Way	Rectangle	500	6.94
	14	30	5600	2130	AC220-240V	2 Way	Rectangle	500	6.94
AL21802	14	30	2700	1290	AC220-240V	2 Way	Rectangle	900	TBA
	14	30	3000	1560	AC220-240V	2 Way	Rectangle	900	TBA
	14	30	4000	1860	AC220-240V	2 Way	Rectangle	900	TBA
	14	30	5600	2130	AC220-240V	2 Way	Rectangle	900	TBA
AL21803	25	10	2700	2400	AC100-240V	1 Way	Square	900	16.3
	25	10	3000	2600	AC100-240V	1 Way	Square	900	16.3
7.22.000	25	10	4000	2800	AC100-240V	1 Way	Square	900	16.3
	25	10	5600	3000	AC100-240V	1 Way	Square	900	16.3
	25	10	2700	2400	AC100-240V	1 Way	Square	1200	TBA
AL21804	25	10	3000	2600	AC100-240V	1 Way	Square	1200	TBA
	25	10	4000	2800	AC100-240V	1 Way	Square	1200	TBA
	25	10	5600	3000	AC100-240V	1 Way	Square	1200	TBA
	25	10	2700	2400	AC100-240V	1 Way	Round	900	13.3
AL21805	25	10	3000	2600	AC100-240V	1 Way	Round	900	13.3
	25	10	4000	2800	AC100-240V	1 Way	Round	900	13.3
	25	10	5600	3000	AC100-240V	1 Way	Round	900	13.3
AL21806	25	10	2700	2400	AC100-240V	1 Way	Round	1200	16.3
	25	10	3000	2600	AC100-240V	1 Way	Round	1200	16.3
	25	10	4000	2800	AC100-240V	1 Way	Round	1200	16.3
	25	10	5600	3000	AC100-240V	1 Way	Round	1200	16.3
AL21807	25	10	2700	2400	AC100-240V	2 Way	Round	900	13.3
	25 25	10	3000	2600	AC100-240V	2 Way	Round	900	13.3
	25	10	4000 5600	2800	AC100-240V	2 Way	Round	900	13.3
				3000	AC100-240V	2 Way	Round	900	13.3
	25 	10	2700 3000	2400	AC100-240V AC100-240V	2 Way 2 Way	Round	1200	16.3
AL21808	25	10	4000	2800	AC100-240V AC100-240V	2 Way	Round	1200	16.3
	25	10	5600	3000	AC100-240V AC100-240V	2 Way	Round	1200	16.3
	7	15	2700	645	AC220-240V	1 Way	Oval	500	TBA
AL21809	7	15	3000	780	AC220-240V	1 Way	Oval	500	TBA
	7	15	4000	930	AC220-240V	1 Way	Oval	500	TBA
	7	15	5600	1085	AC220-240V	1 Way	Oval	500	TBA
	7	15	2700	645	AC220-240V	1 Way	Oval	900	TBA
AL21810	7	15	3000	780	AC220-240V	1 Way	Oval	900	TBA
	7	15	4000	930	AC220-240V	1 Way	Oval	900	TBA
	7	15	5600	1065	AC220-240V	1 Way	Oval	900	TBA
	14	30	2700	1390	AC100-240V	1 Way	Oval	500	TBA
	14	30	3000	1560	AC100-240V	1 Way	Oval	500	TBA
AL21811	14	30	4000	1860	AC100-240V	1 Way	Oval	500	TBA
	14	30	5600	2130	AC100-240V	1 Way	Oval	500	TBA
	14	30	2700	1390	AC100-240V	1 Way	Oval	900	TBA
AL21812	14	30	3000	1560	AC100-240V	1 Way	Oval	900	TBA
	14	30	4000	1860	AC100-240V	1 Way	Oval	900	TBA
	14	30	5600	2130	AC100-240V	1 Way	Oval	900	TBA
						* Please confirm of	colour tempe	rature when c	uotina / orderina


 $<sup>^{\</sup>star}$  Please confirm colour temperature when quoting / ordering


## **Dimensions**

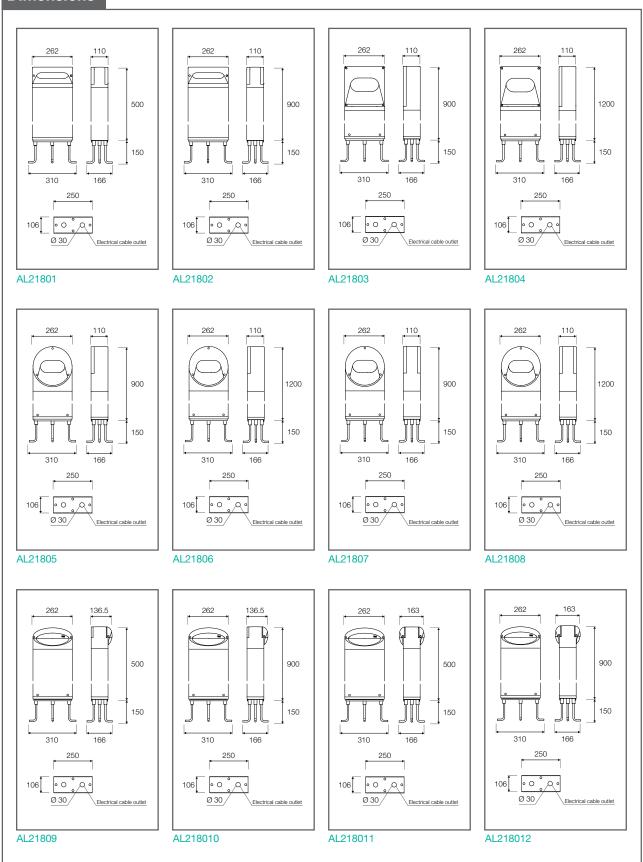





## **Photometry**






#### AL21801







AL21803









AL21805




AL21806




AL21807




AL21808



#### AL21809



AL218010



AL218011

AL218012

# LEVATA AL21800 WALL



#### **Technical Features**

- Three wattage options: 7W, 13W or 21W
- Face shape options: rectangular, square, round or oval
- IP65 rated
- Class I protection
- ADC3 die-cast aluminium alloy housing
- 1090 high purity aluminium reflector
- 4mm tempered clear glass
- Stainless steel fixings, allen headed screws
- Mechanical and chemical anti-corrosion pre-treatment, powder coated with 10 year normal UV protection
- Integrated electronic driver with thermal and overload protection
- Surge protection 4kV
- Waterproof cable at maximum ø10mm insert to luminaire
- Ambient temperature tested: -40°C ~ +50°C



AL21813



AL21815

AL21817



AL21814



AL21816



AL21818

 Matching bollard versions available as part of the Levata LED family

Mounting position;
 Wall recessed: AL21813, AL21814,
 AL21815, AL21816, AL21817
 Surface mount: AL21818

### **Applications**


Amenity

#### Colours






### **Dimensions**




AL21813




269.5

AL21814



<u>o 261</u>
125

AL21815





AL21818





	Wattage (W)	No. of LEDs	Colour Temp. (K) *	Lumen Output (lm)	Input Voltage	Input Voltage for 1:10V	Face Shape	Weight (kg)
AL21813	7	15	2700	645	AC220-240V	N/A	Rectangle	2.38
	7	15	3000	780	AC220-240V	N/A	Rectangle	2.38
	7	15	4000	930	AC220-240V	N/A	Rectangle	2.38
	7	15	5600	1065	AC220-240V	N/A	Rectangle	2.38
AL21814	21	24	2000	1944	AC220-240V	AC100-240V	Square	3.64
	21	24	2400	2208	AC220-240V	AC100-240V	Square	3.64
	21	24	2700	2304	AC220-240V	AC100-240V	Square	3.64
	21	24	3000	2400	AC220-240V	AC100-240V	Square	3.64
	21	24	4000	2496	AC220-240V	AC100-240V	Square	3.64
	21	24	5600	2616	AC220-240V	AC100-240V	Square	3.64
AL21815	21	24	2000	1944	AC220-240V	AC100-240V	Round	3.65
	21	24	2400	2208	AC220-240V	AC100-240V	Round	3.65
	21	24	2700	2304	AC220-240V	AC100-240V	Round	3.65
	21	24	3000	2400	AC220-240V	AC100-240V	Round	3.65
	21	24	4000	2496	AC220-240V	AC100-240V	Round	3.65
	21	24	5600	2616	AC220-240V	AC100-240V	Round	3.65
AL21816	13	15	2700	1440	AC220-240V	AC100-240V	Oval	2.58
	13	15	3000	1560	AC220-240V	AC100-240V	Oval	2.58
AL21010	13	15	4000	1860	AC220-240V	AC100-240V	Oval	2.58
	13	15	5600	2130	AC220-240V	AC100-240V	Oval	2.58
AL21817	7	15	2700	645	AC220-240V	AC100-240V	Oval	1.89
	7	15	3000	780	AC220-240V	AC100-240V	Oval	1.89
	7	15	4000	930	AC220-240V	AC100-240V	Oval	1.89
	7	15	5600	1065	AC220-240V	AC100-240V	Oval	1.89
AL21818	7	15	2700	645	AC220-240V	AC100-240V	Oval	1.89
	7	15	3000	780	AC220-240V	AC100-240V	Oval	1.89
	7	15	4000	930	AC220-240V	AC100-240V	Oval	1.89
	7	15	5600	1065	AC220-240V	AC100-240V	Oval	1.89


# Photometry














#### ARCHITECTURAL LIGHTING

# ADARA AL11400 UP / DOWNLIGHT







#### **Benefits**

- Powerful LEDs offer energy savings and cost reduction for maintenance
- Luminaire housing has a high resistance to UV and is treated with highly antioxidant water-repellent lubricating solution to lengthen lifespan
- Available in anthracite or light grey for architectural use
- Highly efficient thermoplastic with high vacuum deposit for heightened luminaire care
- 15° or 50° beam option offerseffective and evenly distributed up / downlighting
- Design allows for ease of maintenance

#### **Technical Features**

- · Wall mounted luminaire
- · Integral driver
- Double powder coated polyester finish with high resistance to UV and oxidation
- Sealed to IP65
- Stainless steel A4-70 treated external fixings
- Extruded aluminium housing EN AW-6063 T5 / EN-AB 47100
- Soda-lime tempered glass 4mm
- Silicon sealing gasket
- Polypropylene cable gland M16 ø5, 5 / 10mm

#### **Applications**

- Architectural
- Surface Mounted



#### **Beam Types**

- 15°
- 50°


#### Colours




	Wattage (W)	Power Supply	No. of LEDs	Beam	Colour Temp. (K) **	Lumen Output (Im)	LED Driver	Fixture Colour
AL11405	52	220-240V 50/60HZ	2 x 1	15°	3000	2 x 2760	Integral	Anthracite
AL11406	52	220-240V 50/60HZ	2 x 1	15°	3000	2 x 2760	Integral	Light grey
AL11407	52	220-240V 50/60HZ	2 x 1	50°	3000	2 x 2760	Integral	Anthracite
AL11408	52	220-240V 50/60HZ	2 x 1	50°	3000	2 x 2760	Integral	Light grey

<sup>\*\*</sup> Other colour temperatures available on request

### **Key features**




**Dimensions** 



AL11405 & AL11406 Luminaire: 52W 3000K

Lamp: 2 LED

Power: 220-240V 50/60HZ




AL11407 & AL11408

Luminaire: 52W 3000K

Lamp: 2 LED

Power: 220-240V 50/60HZ



### ADARA AL11400 DOWNLIGHT







#### **Benefits**

- Powerful LEDs offer energy savings and cost reduction for maintenance
- Luminaire housing has a high resistance to UV and is treated with highly antioxidant water-repellent lubricating solution to lengthen lifespan
- Available in anthracite or light grey for architectural use
- Highly efficient thermoplastic with high vacuum deposit for heightened luminaire care
- 15° or 50° beam option offers effective downlighting
- Ability to be used as either a down or uplighter
- Design allows for ease of maintenance

#### **Technical Features**

- Wall mounted luminaire
- Integral driver
- Double powder coated polyester finish with high resistance to UV and oxidation
- Sealed to IP65
- Stainless steel A4-70 treated external fixings
- Extruded aluminium housing EN AW-6063 T5 / EN-AB 47100
- Soda-lime tempered glass 4mm
- Silicon sealing gasket
- Polypropylene cable gland M16 ø5, 5 / 10mm

#### **Applications**

- Architectural
- Surface Mounted



#### **Beam Types**

- 15°
- 50°

#### **Colours**




Anthracite

Light grey


	Wattage (W)	Power Supply	No. of LEDs	Beam	Colour Temp. (K) **	Lumen Output (Im)	LED Driver	Fixture Colour
AL11401	26	220-240V 50/60HZ	1	15°	3000	2760	Integral	Anthracite
AL11402	26	220-240V 50/60HZ	1	15°	3000	2760	Integral	Light grey
AL11403	26	220-240V 50/60HZ	1	50°	3000	2760	Integral	Anthracite
AL11404	26	220-240V 50/60HZ	1	50°	3000	2760	Integral	Light grey

<sup>\*\*</sup> Other colour temperatures available on request


#### **Key features**







Polar Intensity
Diagram



Dimensions

AL11401 & AL11402 Luminaire: 26W 3000K

Lamp: 1 LED


Power: 220-240V 50/60HZ

AL11403 & AL11404 Luminaire: 26W 3000K

Lamp: 1 LED

Power: 220-240V 50/60HZ

All dimensions are in mm.

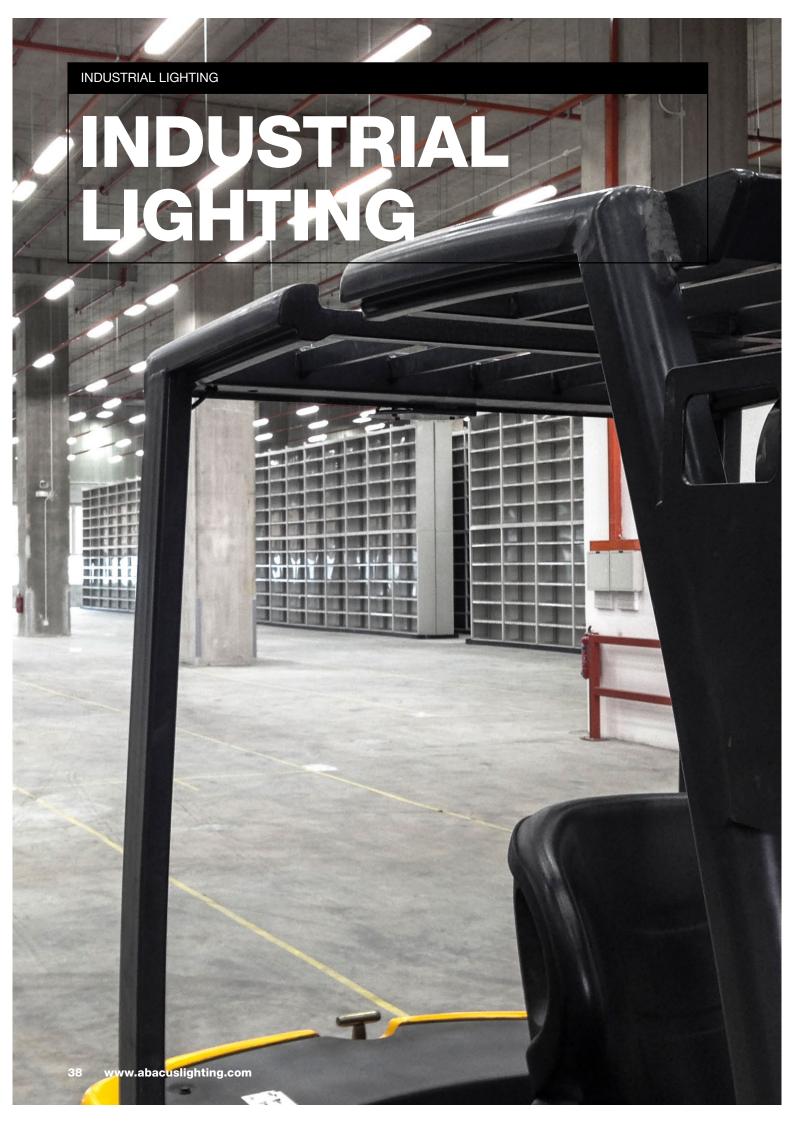

#### **INDUSTRIAL LIGHTING**

# **H-LUM** AL60500





H-LUM light is a durable, highly effective industrial LED luminarie for high ceiling installation. It is an ideal solution for distribution centres, production facilities, and warehouses or gyms, which require high illumination but minimum maintenance. With a finely engineered housing, made of anodised, extruded aluminum, H-LUM fixture dissipates heat and keeps the LEDs inside cool and bright for years.



- Low maintenance
- Easy to mount
- · Detachable driver
- Durable die cast aluminium housing
- Optics to suit all applications
- Dimming options available

#### **Technical Features**

- IP65 and IK08 rated
- Efficacy up to 149 lm/W
- CRI >80
- Colour temperature 4,000K
- Surge protection 2kV / 4kV
- Controls; Dali





- Emergency option available
- Protection against overheating

#### **Applications**

- Industrial
- Amenity


#### Colour



Silver Matt

#### **Dimensions**

198	288	396	576
405	405	405	405
123	123	123	123
360	460	590	800
276	381	507	717
171	276	402	612
89	89	89	89
4	5	7	9
	405 123 360 276 171 89	405 405 123 123 360 460 276 381 171 276 89 89	405 405 405 123 123 123 360 460 590 276 381 507 171 276 402 89 89 89

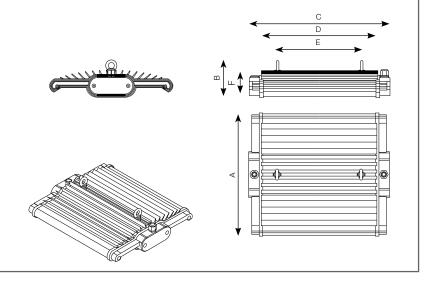


All dimensions are in mm.

	H-LUM Standard	IIIII Dromium				
		H-LUM Premium				
System efficacy (lm/W)	Up to 145	Up to 149				
Supply voltage (VAC)	220-240	220-240				
LED	198 - 576	198 - 576				
Power (W)	120 - 290	60 - 260				
Luminous flux (lm)	16,000 - 42,100	8,740 - 38,720				
Weight (kg)	4, 5, 7, 9	4, 5, 7, 9				
Power factor	> 0.97	> 0.97				
Advisable installation height	Up to 16m	Up to 16m				
Lifetime L80B10	> 60,000 h	> 60,000 h				
CCT	4,000K; optional 5,700K	4,000K; optional 5,700K				
CRI	> 80	> 80				
Ingress protection	IP65	IP65				
Mechanical strength	IK08	IK08				
Surge protection options (kV)	2, 4	2, 4				
Operating temperature	-30°c to +45°c	-30°c to +55°c				
Electrical / Appliance class	Clas	ss 1				
Dimming levels	0 - 1	00%				
Emergency Lighting	1 or 3 h					
Colour	Silver Matt					
Housing material	Housing: extruded anodised aluminium. Cover: extruded PMMA optics					
Mounting	Pendant					
Remote control options	DALI					
Warranty	5 years on electronics, 10 years on mechanical parts					

Item No.	LED	Power (W)	Luminous flux (lm)	Efficacy (lm/W)	Optics available	Control	Additional options
AL60501	198 288 396 576	120 150 220 290	16,000 21,400 31,400 42,100	133 143 143 145	000	able	Motion Detector MD7 Emergency module 1/3 h Motion Detector MD7 Motion Detector MD15 Motion Detector MD15
AL60502	198 288 396 576	120 150 220 290	16,000 21,400 31,400 42,100	133 143 143 145	010	I, programmable	Motion Detector MD7 Emergency module 1/3 h Motion Detector MD7 Motion Detector MD15 Motion Detector MD15
AL60503	198 288 396 576	120 150 220 290	16,000 21,400 31,400 42,100	133 143 143 145	111	DAU,	Motion Detector MD7 Emergency module 1/3 h Motion Detector MD7 Motion Detector MD15 Motion Detector MD15

Premium versions available upon request.

#### **Photometry**

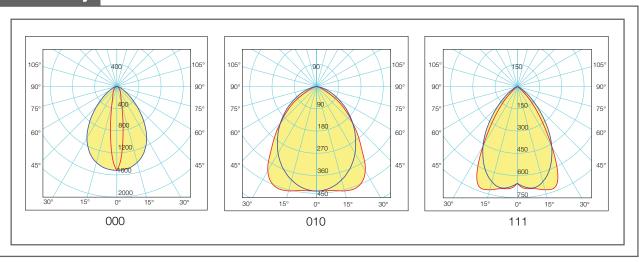




#### **Motion detector**


Reducing energy consumption of buildings is no longer possible just with an integration of highly efficient LEDs. Integrated sensor solutions provide additional energy savings and dynamic control of the light, not only with presence dectection, but also with measuring the daylight and adjusting the light levels of the light. Because the H-LUM luminaires are suitable for high installations, we provide the PIR technology of the sensors. There are two solutions available in order to optimise the usage of

them. The sensors can be used for mounting heights up to 7m and up to 15m and provide a wide dectection area. Programming or commissioning of the sensors can be done by using IR handheld unit, from the ground.

#### **Functional specifications**

- Daylight sensing
- ▶ Time delay function
- ▶ Adjustable detection sensitivity
- ▶ Programmable via optional IR handset
- ▶ ON / OFF override via optional IR handset





Sensor reference	Sensor technology	Mounting heights	IR remote programming	Additional masking shields to tailor detection zones
MD7	PIR	7m	Optional IR handheld unit	No
MD15	PIR	15m	Optional IR handheld unit	Yes

#### **INDUSTRIAL LIGHTING**

# **-LUM** AL61200





Q-LUM is a unique industrial LED lamp with a thoughtfully designed gasket, end caps and extruded profile that provide a high level of protection against dust and water permeation. It is made of polycarbonate, and is high heat and shock resistant. The Q-LUM LED is ideal for garages, production facilities, workshops, and corridors.



#### **Benefits**

- Low maintenance
- Long lifetime
- · Energy saving
- Easy to mount

#### **Technical Features**

- IP65 and IK08 rated
- Plug & play lightweight installation
- Quick access to connectors
- Efficacy up to 112 lm/W
- CRI >80
- Controls: DALI (optional)

#### **Applications**

• Industrial

#### Colour




Silver (RAL 7035)

#### Mounting accessory





#### **Dimensions**

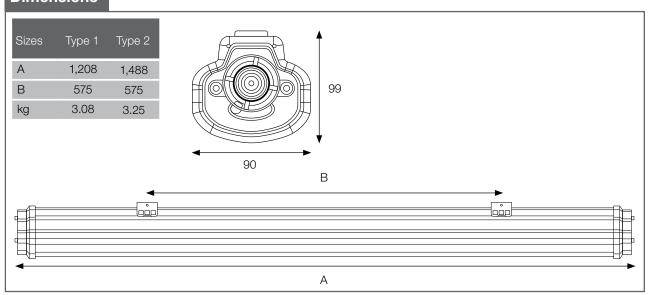


All dimensions are in mm.



	Q-LUM
System efficacy (lm/W)	Up to 112
Supply voltage (VAC)	220-240
Power (W)	50 - 60
Luminous flux (lm)	5,600 - 6,500
Weight (kg)	3.08, 3.25
Lifetime L80B10	> 60,000 h
CCT	4,000K
CRI	> 80
Photobiological risk	Risk group 0
Ingress protection	IP65
Mechanical strength	IK08
Operating temperature	-10°c to +35°c
Electrical / Appliance class	Class 1
Colour	Silver (RAL7035)
Housing material	Polycarbonate (PC)
Mounting	Pendant or surface mounting
Remote control options	DALI (optional)
Warranty	5 years
Certificates	EN 55015: 2013 + A1: 2015, EN 61547: 2009, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EMC, EN 60598-1: 2015, EN 60598-2-1: 1989, EN 62493: 2015, CE

#### Photometry

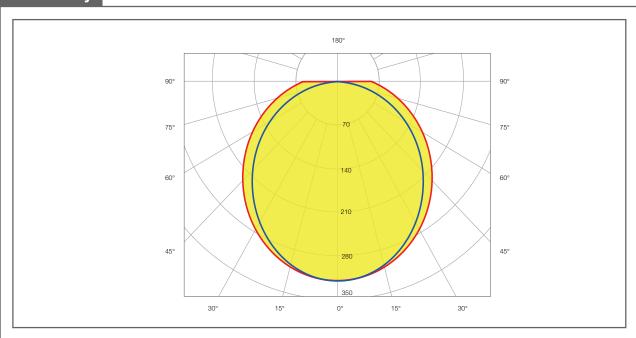

	Power (W)	Luminous Flux (lm)*	Efficacy (lm/W)	Body type
AL61201	50	Up to 5,600	112	1
AL61202	60	Up to 6,500	108	2

\*Luminous Flux is valid for CCT 4000K

#### **INDUSTRIAL LIGHTING**

# **ARDUO** AL22700



#### **Benefits**

 Continuity without changing fitting with covers to suit lighting requirements

#### **Technical Features**

- Power: 17W (System power 19.5W)
- Colour temperature 5000K as standard
- Available in two sizes
- · Available with half eyelid cover
- Heavy-duty die-cast aluminium housing and top frame with powdercoat finish
- Can be tapped for side conduit entry
- LumaLens clear or opal polycarbonate vandal-resistant lens
- LumaFit LEDs on aluminium boards
- Surface mount with included brackets (optional adjustable brackets available)



- Dimmable driver
- 5 year warranty
- Rated life: 50000 hours
- Voltage 120 277V, 50/60Hz
- Operating temperature -40°C ~ + 40°C

#### Colour



\\\\\



Bronze

Black

#### **Arduo Range**






	Wattage (W)	Lumen Output (lm)	Length (mm)	Style	Colour Temp. (K)	Colour (As Standard) ***	Lens
AL22701 *	43	5538	308	Horizontal, full lens	5000	Grey	Clear
ALZZ/U1	26.2	2940	308	Horizontal, full lens	5000	Grey	Opal
AL22702	43	4879	308	Horizontal, eyelid	5000	Grey	Clear
ALZZIUZ	26.5	2369	308	Horizontal, eyelid	5000	Grey	Opal
AL22703	43	5294	308	Vertical, eyelid	5000	Grey	Clear
AL22703	26.5	2369	308	Vertical, eyelid	5000	Grey	Opal
AL22704 **	81.4	9183	613	Horizontal, full lens	5000	Grey	Clear
AL22/04	52	6632	613	Horizontal, full lens	5000	Grey	Opal

#### STIRRUP AND COLOUR OPTIONS:

- \* Stirrup option available, add code: LV1BR
- \*\* Stirrup option available, add code: LV2BR
- \*\*\* Please specify if other colour when quoting / ordering: Z = Bronze / W = White / G = Grey

#### **Key features**

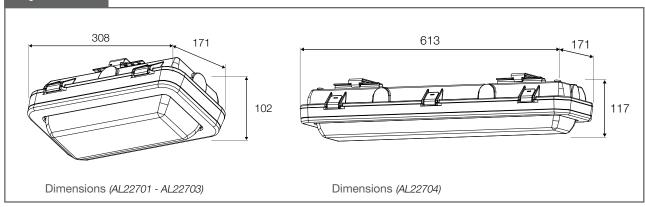

All dimensions are in mm.



# ROAD LIGHTING



#### **ROAD LIGHTING**

# **E-LUM** AL62000





An aerodynamic road lighting luminaire designed to integrate perfectly into urban spaces. With its modular construction, upgrades and replacements of key components such as; power supply, light engine and LED modules, ensure the luminaire takes full advantage of technological improvements.

Available in two body sizes and offering 10 standard lumen packages, from 1,450 to 19,350 lumens, the AL62000 Series comes with six different optics to suit a wide variety of lighting scenarios.



- · Easily maintained
- Durable die cast aluminium housing
- Flexibility with vertical or horizontal spigot mounting
- Multiple optics
- -40°C to +40°C

#### **Technical Features**

- Controls; Dali, 1-10V, RF or PLC (specify at enquiry)
- Efficacy up to 112 lm/W
- Integrated 5 level dimming module (optional)



- Protection against overheating
- Constant light output (optional)
- Time-dependant luminous flux control
- Power reduction; flexible luminous flux
- IP66 and IK09 rated
- Colour temperature 4000K as standard (options available)
- CRI ≥70
- Power supply 220Vac 277Vac
- Standard surge protection 4kV (10kV option available)
- Solar options available in 26W & 56W


#### **Applications**

- Road
- Open Area
- Rail
- Amenity

#### Colour




#### **Dimensions**

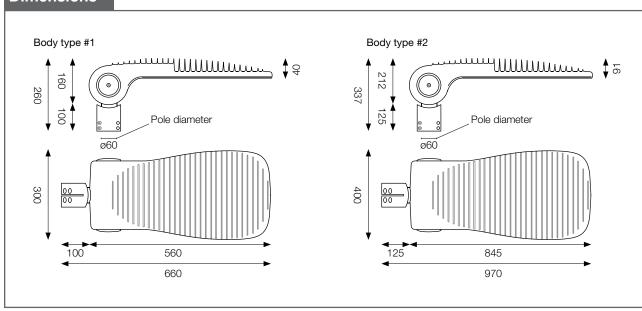


	Body type 1	Body type 2					
LED	8-24	48-96					
Power (W)	10 - 80	80 - 220					
Light flux (lm)	1,450 - 8,400	8,490 - 27,000					
Weight	7kg	15kg					
EPA Rating	0.0552m <sup>2</sup>	0.0862m <sup>2</sup>					
Dimensions (mm)	660 x 300 x 260	970 x 400 x 377					
Factor of colour rendering CRI	≥`	70					
Mechanical strength	IK	09					
Protection class	IP	66					
Additional surge protection	10kV / 6kV; addition	al SPD 10kV / 10kA					
Operating temperature	-40°C to	o +55°C					
Lifetime L80B10	> 65,00	0 hours					
Supply voltage	220Vac - 240	)Vac 50,60Hz					
Power factor	> 0	.96					
CCT	4,000K (others	upon request)					
Mounting	60mm pole (adaptor required	for other columns dimensions)					
Tilt	-10° to +15° (horizontal	and vertical installation)					
Certificates	IEC 60529:2001; EN 60598-1:2008; cl.9.2.2 & 9.2.7; IEC 60598-2-3 (Third edition):2002 +A1:2011 used in conjunction with IEC 60598-1 (Seventh edition): 2008; IEC 60598-26:1994+A1:1996 used in conjunction with IEC 60598-1:2008; EC 62031:2008 (First edition); CE; ENEC; ZIK						
Guarantee	5 years on electrical, 10 years on mechanical						
Wireless control							

#### Installation

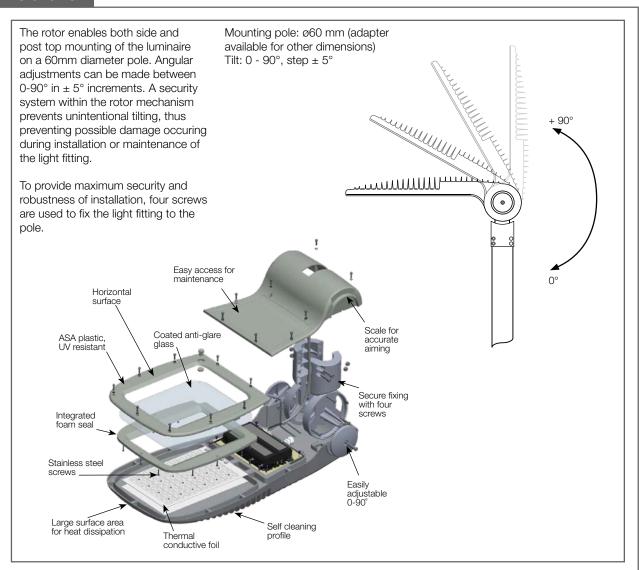

#### **Optics**

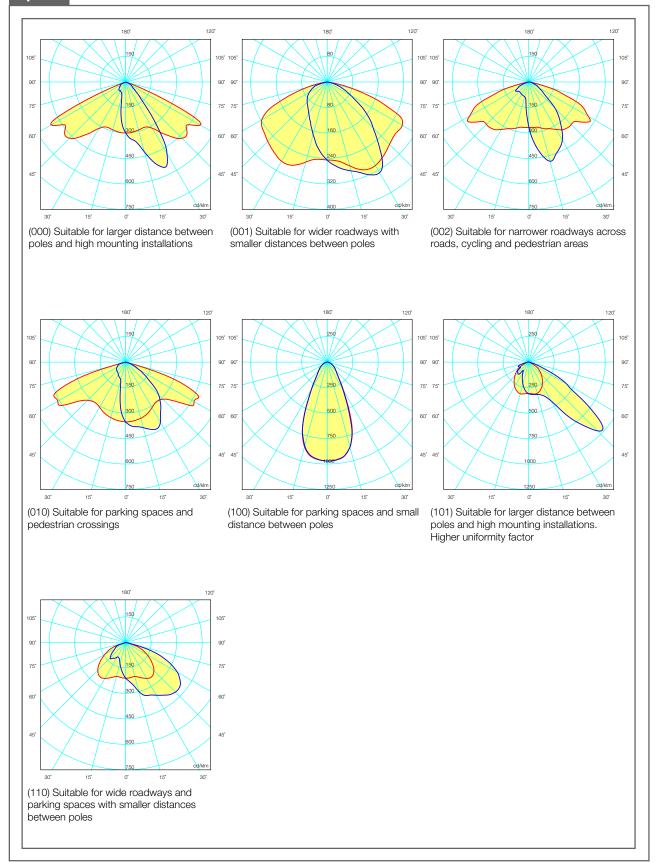

Luminaire code	LED type	Luminaire Wattage (W)	Luminaire - Lumen output (lm)	Number of LEDs	Body type	Light distribution type	Weight (kg)	Wind area (m²)
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1	(000) Suitable for larger	7	0.0552
AL62001	Standard	80	8400	24	1	(000) Suitable for larger distance between poles	7	0.0552
AL02001	Stariuaru	80	8490	48	2	and high mounting installations	15	0.0862
		95	10500	80	2	ii iStaliatiOi iS	15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1		7	0.0552
AL62002	Standard	80	8400	24	1	(001) Suitable for wider roadways with smaller	7	0.0552
AL02002	Stariuaru	80	8490	48	2	distances between poles	15	0.0862
		95	10500	80	2		15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1	(002) Suitable for narrower roadways	7	0.0552
		60	6000	24	1		7	0.0552
		80	8400	24	1		7	0.0552
AL62003	Standard	80	8490	48	2	across roads, cycling and	15	0.0862
		95	10500	80	2	pedestrian areas	15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1		7	0.0552
		80	8400	24	1	(100) Suitable for parking	7	0.0552
AL62004	Standard	80	8490	48		spaces and pedestrian	15	
					2	crossings		0.0862
		95	10500	80	2		15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862



Luminaire code	LED type	Luminaire Wattage (W)	Luminaire - Lumen output (lm)	Number of LEDs	Body type	Light distribution type	Weight (kg)	Wind area (m²)
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1		7	0.0552
AL 00005	Observatorial	80	8400	24	1	(101) Suitable for parking	7	0.0552
AL62005	Standard	80	8490	48	2	spaces and small distance between poles	15	0.0862
		95	10500	80	2		15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862
		15	1450	8	1		7	0.0552
	Standard	30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1	(010) Suitable for larger	7	0.0552
		80	8400	24	1	distance between poles and high mounting installations. Higher uniformity factor	7	0.0552
AL62006		80	8490	48	2		15	0.0862
		95	10500	80	2		15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862
		15	1450	8	1		7	0.0552
		30	2850	12	1		7	0.0552
		40	3800	24	1		7	0.0552
		60	6000	24	1	(110) Outtolele formitale	7	0.0552
AL62007	Standard	80	8400	24	1	(110) Suitable for wide roadways and parking	7	0.0552
AL02007	Stariuaru	80	8490	48	2	spaces with smaller	15	0.0862
		95	10500	80	2	distances between poles	15	0.0862
		120	11450	48	2		15	0.0862
		140	14900	80	2		15	0.0862
		190	19350	96	2		15	0.0862

#### **ROAD LIGHTING**

## **S-LUM** AL61000





An innovative road lighting luminaire of modular construction designed with ease of maintenance in mind. Toolless upgrades of key components such as power supply and light engine along with field-replaceable LED modules ensure the luminaire takes full advantage of future improvements in LED technology.

Constructed from high pressure diecast aluminium, the AL61000 series is available in two body sizes and offers six standard lumen packages, from 1200 to 15,600 lumens.

#### **Benefits**

- Tool-less quick access latch
- Screw-less maintenance
- Durable die-cast aluminium housing
- Vertical or horizontal spigot mounting
- Multiple optics

#### **Technical Features**

- Controls; Dali, 1-10V, RF or PLC (specify at enquiry)
- Efficacy up to130 lm/W
- Integrated 5 level dimming module (optional)



- Overheat protection
- Constant light output (optional)
- Time-dependant lumious flux control
- Power reduction; flexible lumious flux
- IP66 and IK09 rated
- Colour temperature 4000K as standard (options available)
- CRI ≥70 (80 optional)
- Power supply 100Vac 277Vac
- Standard surge protection 6kV


#### **Applications**

- Road
- Open Area
- Rail
- Amenity

#### Colour



#### **Dimensions**

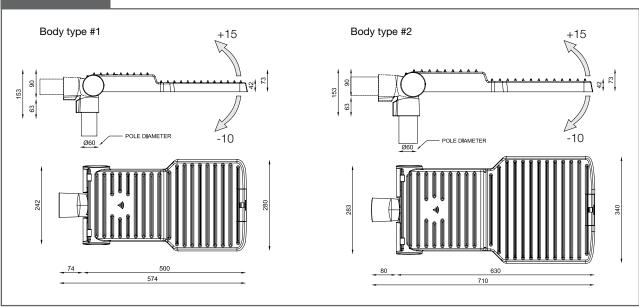


All dimensions are in mm.



	Body type 1	Body type 2			
LED	4-8	12-24			
Power (W)	10, 25, 40	60, 80, 120			
Light flux (lm)	1,188 - 5,600	6,500 - 16,800			
Weight	6kg	9kg			
EPA Rating	0.0336m <sup>2</sup>	0.0406m <sup>2</sup>			
Dimensions (mm)	574 x 242 x 153	703 x 285 x 153			
Factor of colour rendering CRI	≥ 70 (80	optional)			
Mechanical strength	IK	09			
Protection class	IPO	66			
Additional surge protection	10kV / 6kV; additional SPD 10kV / 10kA				
Operating temperature	-40°C to	o +55°C			
Electrical class	Class I (Clas	s II optional)			
Lifetime L80B10	> 100,00	00 hours			
Supply voltage	220Vac -	- 240Vac			
Power factor	> 0	.96			
CCT	4,000K (others av	ailable on request)			
Mounting	60mm or 7	76mm pole			
Tilt	-10° to +15° (horizontal	and vertical installation)			
Certificates	-3:2002 + A1:2011; EN 60598-1:2015; EN 008 + A1+A2; IEC/TR 62778:2014; EN6006827: CE, ENEC				
Guarantee	5 years on electrical, 10 years	on mechanical, upon request			
Remote control Optional RF or PLC					

#### **Optics**

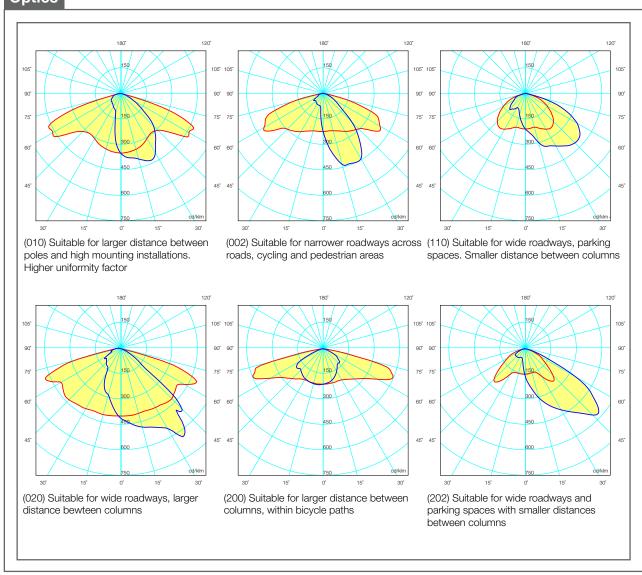

Luminaire code	LED type	Luminaire Wattage	Lumen output (lm)	Driver current (mA)	Number of LEDs	Body type	Light distribution type	Weight (kg)	Wind area (m²)
		10	1200	700	4	1	(010) Suitable for	6	0.0336
		25	3270	700	6	1	larger distance	6	0.0336
AL61001	Standard	40	5110	700	8	1	between poles and high mounting	6	0.0336
71201001	Otal Idal d	60	7540	700	12	2	installations.	9	0.0406
		80	10200	700	16	2	Higher uniformity factor	9	0.0406
		120	15530	700	24	2	lactor	9	0.0406
		10	1200	700	4	1		6	0.0336
		25	3270	700	6	1	(002) Suitable	6	0.0336
AL61002	Standard	40	5110	700	8	1	for narrower roadways across	6	0.0336
71201002	Otaridard	60	7540	700	12	2	roads, cycling and	9	0.0406
		80	10200	700	16	2	pedestrian areas	9	0.0406
		120	15530	700	24	2		9	0.0406
		10	1200	700	4	1		6	0.0336
		25	3270	700	6	1	(110) Suitable for	6	0.0336
	0	40	5110	700	8	1	wide roadways and parking spaces. Smaller	6	0.0336
AL61003	Standard	60	7540	700	12	2		9	0.0406
		80	10200	700	16	2	distance between columns	9	0.0406
		120	15530	700	24	2		9	0.0406
		10	1200	700	4	1		6	0.0336
		25	3270	700	6	1		6	0.0336
	0	40	5110	700	8	1	(020) Suitable for wide roadways,	6	0.0336
AL61004	Standard	60	7540	700	12	2	larger distance between columns	9	0.0406
		80	10200	700	16	2		9	0.0406
		120	15530	700	24	2		9	0.0406
		10	1200	700	4	1		6	0.0336
		25	3270	700	6	1	(200) Suitable for	6	0.0336
		40	5110	700	8	1	larger distance	6	0.0336
AL61005	Standard	60	7540	700	12	2	between columns, within bicycle	9	0.0406
		80	10200	700	16	2	paths	9	0.0406
		120	15530	700	24	2		9	0.0406
		10	1200	700	4	1		6	0.0336
		25	3270	700	6	1	(202) Suitable for	6	0.0336
A1 04 222	01 .	40	5110	700	8	1	wide roadways and parking	6	0.0336
AL61006	Standard	60	7540	700	12	2	spaces with	9	0.0406
		80	10200	700	16	2	smaller distances between columns	9	0.0406
	120	15530	700	24	2		9	0.0406	

#### **ROAD LIGHTING**

# APOLLO LED AL6666





- Easy assembly and maintenance
- Modular future-proof designed LEDs for easy maintenance
- Excellent thermal management
- High reliability and performance from Cree or Lumiled LEDs
- LM-80 compliant
- >50000 life time to 70% lumen maintenance
- Independent LED drive compartment with Philips Xitanium LED electronic driver(s) built in
- Adaptive for most bracket diameters
- Internal adjustable luminaire elevation

#### **Technical Features**

 A number of optics available for tailored performance A3 Type 3 Long as standard)



- Philips drivers (Xitaninium), dimming available as an option 1:10 Dali
- Utilising CREE LEDs as standard or Lumiled LEDs as an option
- Adjustable mounting bracket to allow for luminaire elevation both bracket or post mounting solutions
- Post top and side mounted spigot entry positions 60mm & 40mm with adaptor accessory (State at time of quoting & ordering)
- NEMA Photoelectric interface option available
- CRI > 75

- CE and UL Certified
- 5 year Warranty for luminaire body, LED modules and driver

#### **Applications**

- Road
- Open Area
- Rail
- Amenity

#### Colour

Light grey

	Wattage (W)	No. of LED Modules	No. of LEDs	Power Consumption (W)	Typical Flux at 4000K (lm)	Dimensions L x W x D (mm)	Windage (m²)	Weight (kg)
AL6666 / 30	30	1	14	33	3300	502 x 346 x 102	0.07	3.4
AL6666 / 60	60	2	28	62	6600	546 x 346 x 102	0.07	4.3
AL6666 / 90	90	3	42	93	9500	626 x 346 x 102	0.07	5.3
AL6666 / 120	120	4	56	123	12500	688 x 346 x 102	0.08	6.3
AL6666 / 150	150	5	70	155	15500	750 x 346 x 102	0.08	7.3
AL6666 / 180	180	6	84	185	18500	812 x 346 x 102	0.08	8.3
AL6666 / 210	210	7	98	216	21500	874 x 346 x 102	0.09	9.3
AL6666 / 240	240	8	112	246	24500	936 x 346 x 102	0.10	10.3
AL6666 / 270	270	9	126	277	27500	998 x 346 x 102	0.10	11.3
AL6666 / 300	300	10	140	308	30500	1060 x 346 x 102	0.11	12.3

# Dimensions Dimensions in mm 086 086 086 086

#### Key features

Colour Rendering:	>75
Colour Temperature:	5000K as standard, 3000K, 4000K upon request
Power Factor:	>0.95
Luminaire Efficiency:	>85%
Ambient Environment:	Temperature: -40 $\sim$ +50°C ; Humidity: 10% $\sim$ 95%
Driver Current:	700mA

# **INDUS LED** AL21000








#### **Benefits**

- Modern looking slim line luminaire for a positive aesthetic feel in a variety of surroundings and application areas
- Fitting equipped with an automatic anti-closing mechanism for safer assembly, installation and maintenance purposes reducing health & safety risks

#### **Technical Features**

- Classification I
- IP66 and IK08 rated
- Constructed to meet EN 60598-1, EN 60598-2-3 standards
- Power correction factor >0.9
- Power supply 220-240V / 50-60Hz
   VAC
- Overload and surge protection upto 10kV
- First brand LED mounted on a pressed aluminium circuit, highly heat dissipating Metal Core Printed Circuit Board (MCPCB)
- Die-cast aluminium body and cover with highly aesthetic aspect
- Spigot post top mounting and spigot side entry mount 46-76mm





- Power supply cable access through a PG 13.5 cable gland (IP68)
- Anti-ageing rubber gaskets with stainless steel closure clips
- Teflon pressure compensation filter
- Driver specification: high efficiency powersource and duration for external use
- Optional body with fin casing on the upper cover available upon request

#### **Applications**

Standard Body

Optional fin body (F)

- Road
- Pathways


#### Colour





#### **Dimensions**

Dimensions in mm











Optional fin body (F)








	Wattage (W)	Lumen Output (lm)	Driver Current (mA)	No. of LEDs	Fixed Driver Available	Light Distribution	Optic	Weight Standard Body (kg)	Weight Fin Body <i>f</i> (kg)	Wind Area (m²)
	81	9920	530	49	Υ			16.9	16.0	0.084
	90	11050	530	56	Υ	(A) Road width greater		16.9	16.0	0.084
AL21001	105	12360	530	63	Υ	than 0.85 x	AB1 / AB1 Optic	17.0	16.1	0.084
	117	13480	530	70	Υ	the column height	0640	17.1	16.2	0.084
	122	14310	530	75	N			17.1	16.2	0.084
	106	12240	700	49	Υ			16.0	16.0	0.084
	120 13640 700 56 Y (A) Road width greater		16.0	16.0	0.084					
AL21011	135	15250	700	63	Υ	than 0.85 x the column height	AB1 / AB1 Optic	17.0	16.1	0.084
	148	16650	700	70	N			17.1	16.2	0.084
	162	17630	700	75	N			17.5	16.6	0.084
	81	9920	530	49	Υ	(B) Road	B1 / B1 Optic	16.9	16.0	0.084
	90	11050	530	56	Υ	equal or less than 0.85 x		16.9	16.0	0.084
AL21002	105	12360	530	63	Υ	the column		17.0	16.1	0.084
	117	13480	530	70	Υ	height - bike/ pedestrian	Орио	17.1	16.2	0.084
	122	14310	530	75	N	pathways		17.1	16.2	0.084
	106	12240	700	49	Υ	(B) Road		16.9	16.0	0.084
	120	13640	700	56	Υ	equal or less than 0.85 x		16.9	16.0	0.084
AL21012	135	15250	700	63	Υ	the column	B1 / B1 Optic	17.0	16.1	0.084
	138	16650	700	70	N	height - bike/ pedestrian	Орио	17.1	16.2	0.084
	162	17630	700	75	N	pathways		17.5	16.6	0.084

#### PROGRAMMABLE DRIVER AVAILABLE ON ALL OPTIONS

For optional body with fin casing (f) please request when quoting and ordering.

#### **Key features**

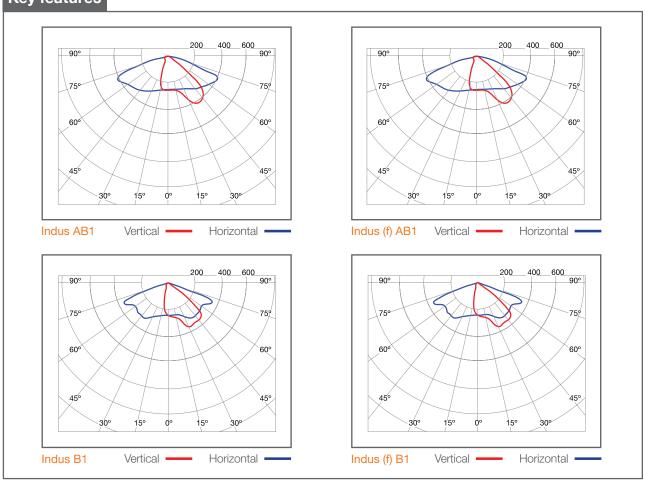

# **INDUS CITY LED** AL21000





#### **Technical Features**

- IP66 and IK09 rated
- XLP or XHP-70 LEDs
- Colour temperature 4000K
- CRI >70
- Power correction factor >0.9
- Constructed to EN 60598-1, EN 60598-2-3
- Programmable and high efficiency electronic power source and duration, knife switch included
- Power supply cable access through PG16 cable gland (IP68)
- Power supply 220 240V / 50 60Hz as standard
- Power supply available in 120 277V / 50 - 60 Hz VAC
- Insulation class I and II
- Programmable drive available
- Cable plate is complete with easily replaceable electronic unit
- L80 >70000
- L70 >80000



- Die-cast aluminium body finished in silver polyester powder (RAL 9006)
- Top cover available as a smooth case as standard, with option to have cross-sectional cooling fin case
- LED module replaceable as one unit including the upper cover
- Extra clear 4mm thick tempered flat glass
- Stainless steel closing clips and anti-ageing rubber gaskets
- Teflon pressure compensation filter
- Automatic anti-closing mechanism to prevent accidental closure during assembly and maintenance

- Post top or side entry with adjustable spigot
- Spigot entry ø46 ø76mm


#### **Applications**

- Commercial
- Rail
- Road
- Amenity

#### Colour




#### **Dimensions**

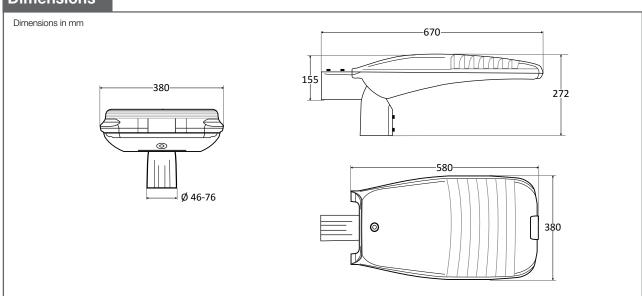




	LED	Wattage	No.	Lumen	Driver	Prog.	Distribution	Optics	Stand	lard body	Fin Body (f)	
	Type	(W)	of LEDs	Output (lm)	Current (mA)		Distribution	Οριίου	Weight (kg)	Wind Area (m²)	Weight (kg)	Wind Area (m²)
		30	12	4430	800	Υ		AB1	10.65	0.091	9.3	0.091
AL21020	XPL	44	18	6330	800	Υ		/ AB1	10.75	0.091	9.9	0.091
		60	24	8400	800	Υ		Optic	10.85	0.091	10.0	0.091
		38	12	5170	1000	Υ		AB1	10.65	0.091	9.3	0.091
AL21022	XPL	57	18	7670	1000	Υ		/ AB1	10.75	0.091	9.9	0.091
		76	24	10060	1000	Υ		Optic	10.85	0.091	10.0	0.091
		103	12	16120	700	Υ		AB1	10.65	0.091	9.3	0.091
AL21024	XHP-70	127	15	19500	700	Υ	(A) Road width greater than 0.85 x	/ AB1	N/A	N/A	9.9	0.091
		135	26	20530	700	Υ	the column height	Optic	10.85	0.091	N/A	N/A
		60	6	9340	800	Υ			10.45	0.091	9.6	0.091
AL21026	XHP-70	88	9	13800	800	Υ		AB1 / AB1	10.55	0.091	9.7	0.091
ALZ 1020	XI II -70	156 16 22620 800 Y	Optic	10.75	0.091	N/A	N/A					
		165	15	23560	900	Υ			N/A	N/A	9.9	0.091
		76	6	11150	1000	Υ		AB1 / AB1	10.45	0.091	9.3	0.091
AL21028	XHP-70	113	9	16360	1000	Υ			10.55	0.091	9.7	0.091
		150	50 12 21000 1000 Y	Optic	10.65	0.091	9.8	0.091				
		30	12	4430	800	Υ		D4 / D4	10.65	0.091	9.8	0.091
AL21021	XPL	44	18	6330	800	Υ		B1 / B1 Optic	10.75	0.091	9.9	0.091
		60	24	8400	800	Υ			10.85	0.091	10.0	0.091
		38	12	5170	1000	Υ			10.65	0.091	9.8	0.091
AL21023	XPL	57	18	7670	1000	Υ		B1 / B1 Optic	10.75	0.091	9.9	0.091
		76	24	10060	1000	Υ			10.85	0.091	10.0	0.091
		103	12	16120	700	Υ	(B) Road width equal	B1 / B1	10.65	0.091	9.8	0.091
AL21025	XHP-70	137	15	19500	700	Υ	or less than 0.85 x	Optic	N/A	N/A	9.9	0.091
		135	16	20530	700	Υ	the column height (pathways)		10.75	0.091	N/A	N/A
		60	6	9340	800	Υ	(pailways)		10.45	0.091	9.6	0.091
AL21027	XHP-70	88	9	13800	800	Υ		B1 / B1	10.55	0.091	9.7	0.091
ALLIVEI	XIII 70	156	16	22620	800	Υ		Optic	10.75	0.091	N/A	N/A
		165	15	23560	900	Υ			N/A	N/A	9.9	0.091
		76	6	11150	1000	Υ		Dt /D:	10.45	0.091	9.6	0.091
AL21029	XHP-70	113	9	16360	1000	Υ		B1 / B1 Optic	10.55	0.091	9.7	0.091
		150 12 21000 1000 Y		350	10.65	0.091	9.8	0.091				


#### **Photometry**



All the optics have CUT-OFF emissions with zero-impact when the floodlight is installed with the glass parallel to the ground.



AB1: for carriageway with a width greater than 0.85 times the height of installation; suitable for large & high speed road ways.




(B) Road width equal or less than 0.85 x the column height (pathways)

ABACUS - FIRST CHOICE FOR SPORTS LIGHTING

# FLOODLIGHTING



Trent Bridge, Nottingham (Challenger® 3)

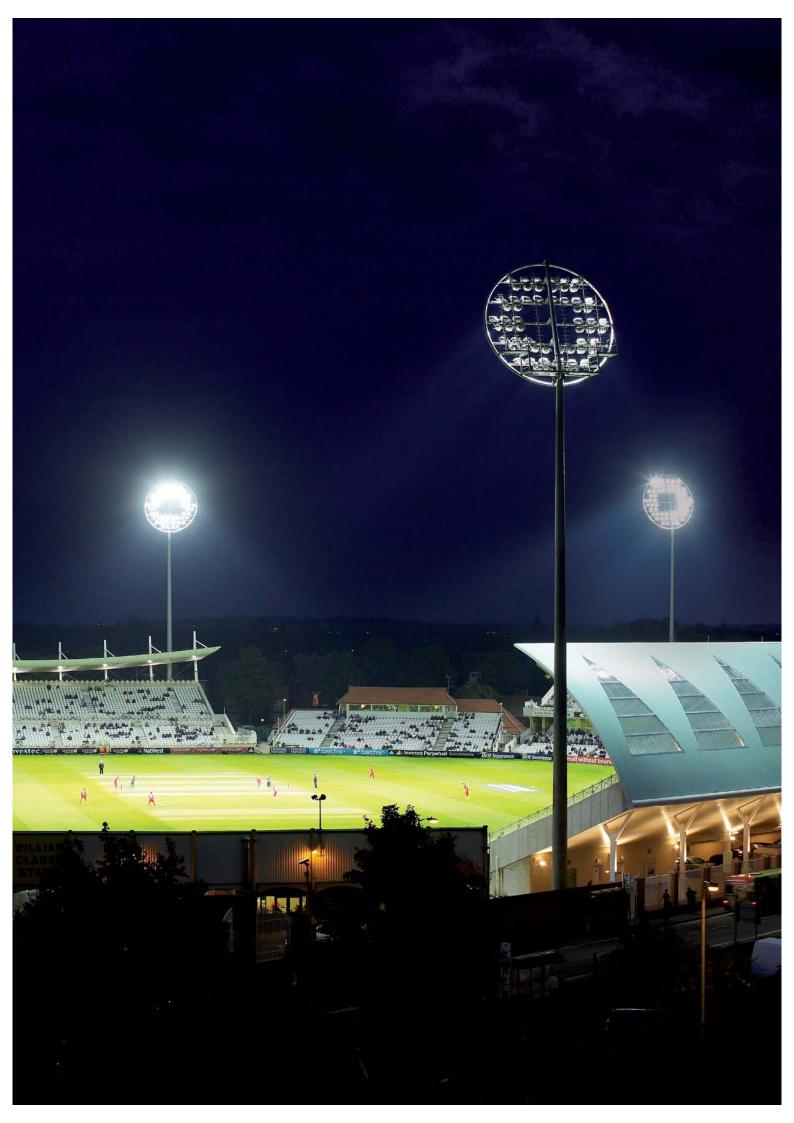

# **AAA-LUX RANGE**

The AAA-LUX range of innovative high powered LED floodlights is built with control, safety and security in mind. The AL Series is designed for large area lighting in places such as ports and airports, whilst the high performance WS Series focuses on sports lighting.

The technical capabilities underpinning this LED range allows ease of control, instant start up and variable switching using the AAA-LUX lighting control management system. This system is capable of dimming or switching all or select sections of a lighting application, lighting via fingertip control or use of sensors, with preprogrammed lighting scenes available including an emergency function which brings all lights up to 100% power. Use of the systems tracking and analytical ability allows designated personnel to optimise for best performance and cost effective performance in addition to implementing preventative maintenance.

#### **AL Series**

- Large area lighting: ports, airports, car parks
- Mounting height between 12m and 45m
- Three illumination distributions: 60°, 90°, 180°


#### **AL360 Series**

- Large area lighting: ports, airports, car parks
- Mounting height upto 25m
- Illumination distribution: 360°

#### **WS Series**

- Sports floodlighting
- Six variations to suit



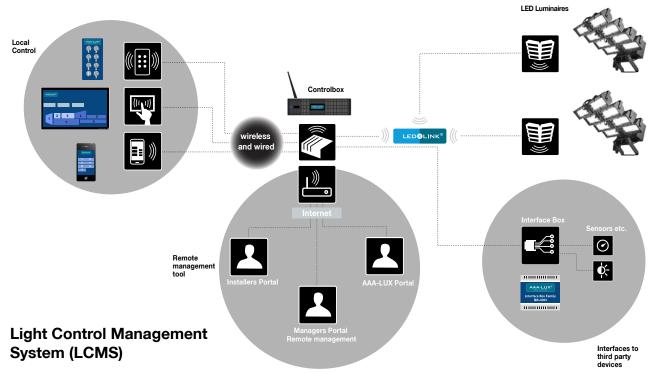

Control, switching and dimming of AAA-LUX floodlights is made possible by the use of a number of user friendly interfaces all connected to the LCMS via LEDxLINK protocol, either locally or remotely. Switchboxes, touchscreens and smart devices provide fingertip control to enable the selection of a number of pre-programmed lighting configurations. In addition, third party devices such as sensors, timers and software interfaces can be seamlessly integrated into the system, providing further functionality and security benefits.

#### **Easy replacement**

- Direct 400VAC or 240VAC connection
- Wireless control
- No complicated bracketry required


Electrically the luminaire will be connected to existing 400VAC / 200VAC electrical installations. Even the existing light switches can remain in place. However, in the case of new installations, cabling costs are significantly lower. First, the product has no in-rush of start-up current, resulting in a much simpler cabling layout and also, fuses can have a lower rating. Secondly, with the wireless control of the luminaires no extra control cabling is needed.

#### Energy saving -Total-cost-of-ownership

- Dimmed to the right level
- Switched on when needed
- Short ROI







Conventional luminaires are based on Metal Halide (MH) or High Pressure Sodium (HPS) lamps. These sources have a start-up and cooling period and cannot be dimmed. Over lifetime these lamps suffer from significant lumen depreciation, which means that new installations over-illuminate the area every night by approximately 40%. Even areas with no activity, but camera surveillance only, are illuminated at full power with MH or HPS light sources.

With the AAA-LUX lighting management system luminaires are set at the requested illumination level.

Areas with no human activities are dimmed to camera level, increasing energy savings above 70%. Beside this, the projected 15 year lifetime reduces lamp replacements costs as well. In many cases, our TCO model calculates breakeven times below 3 years.

## **AL SERIES LED**

AL60, AL90, AL180, AL700



#### **Benefits**

- Wireless control simplifies operation for ease of use
- Centrally monitor and adjust power consumption
- Control system enables efficient planning of maintenance
- No re-lamping costs
- L80 70,000 hours at 25°C ambient
- Driver MTBF > 50,000 hours
- Instant startup allows the light to be switched on and off as and when required, thus saving energy costs by reducing power consumption from wasted light
- Flexible dimming to 10% for low use & security giving substantial energy savings over conventional HID lamps
- Increased system efficiency by reducing wasted light

#### **Technical Features**

 Controllable via smart devices, touchscreen or wireless switch box

- Mounting height 12-45m
- 3 phase as standard
- Single phase 230V option available
- Marine grade as standard
- Die-cast aluminium polyester powder coated body with integrated heat sink and flexible bracket mount
- Lenses installed behind toughened flat glass for maximum integrity of the lenses
- High powered 1.375kW luminaire (AL60, AL90, AL180)
- High powered 0.690kW luminaire (AL700)
- Dimmable in accordance with EN 12193
- Highly efficient optics



#### **Lighting Distribution**

• 60° • 90° • 180°

#### **Applications**

- Large area
- · Ports & terminals
- Airports
- Car parks


#### Colour



#### **Lighting Control & AL Series**

When different zones of a site require full lighting levels and others need to be dimmed at different times through the dark hours, the dimmed zones can be brought back up to full lighting levels instantly for emergencies or to allow maximum dimming duration between working time of the zones. This saves energy, keeps running costs low and increases the level of site security.

# Dimensions in mm 840 660 175 022





#### **Technical Specifications**

AL60, AL90, AL180	Minimum	Typical	Maximum
Voltage input (VAC)	370	400	430
Power factor at 20%-100%	0.90	0.98	
Frequency (Hz)	45		60
Standby power (W)		5	
Colour temperature (K)	4000 & 52	200 options available	
Colour rendering index	70	80	
Weight (kg)		28	
Ingress protection		IP66	
Electrical insulation class		T	
Frontal surface		$0.26  C_w = 1$	
Expected lifetime at Tamb = 25°C		70000hrs	100000hrs
Power consumption at 100% Standard - Heavy Duty ( High Temperature (W)	N)	1375 1200	1425 1250
Current Standard - Heavy Duty ( High Temperature (A)	4	(At 400VAC) 3.5 3.2	(At 375VAC) 3.9 3.5
Operating temperature Standard - Heavy Duty ( High Temperature (°C)	°C) -20 -20		40 50
Luminous efficacy* Standard - Heavy Duty (I High Temperature (Im / V		113.1 117.2	140 140

\* Based on the AL90

AL700	Minimum	Typical	Maximum
Voltage input (VAC)	370	400	430
Power factor at 20%-100%	0.90	0.98	
Frequency (Hz)	45		60
Standby power (W)		5	
Colour temperature (K)	4000 & 5200 option	ns available	
Colour rendering index	70	80	
Weight (kg)		17	
Ingress protection		IP66	
Electrical insulation class		I	
Frontal surface		$0.26 C_{w} = 1$	
Expected lifetime at Tamb = 25°C		70000hrs	100000hrs
Power consumption at 100% Standard - Heavy Duty (W) High Temperature (W)		700 600	725 625
Current Standard - Heavy Duty (A) High Temperature (A)		(At 400VAC) 1.7 1.5	(At 375VAC) 1.8 1.6
Operating temperature Standard - Heavy Duty (°C) High Temperature (°C)	-20 -20		40 50
Luminous efficacy* Standard - Heavy Duty (Im / W) High Temperature (Im / W)	109.7 114.8	11.38 117.9	140 140

\* Based on the AL710

## **AL SERIES LED** AL360



#### **Benefits**

- Wireless control simplifies operation for ease of use
- Centrally monitor and adjust power consumption
- Control system enables efficient planning of maintenance
- No re-lamping costs
- Instant startup allows the light to be switched on and off as and when required, thus saving energy costs by reducing power consumption from wasted light
- Flexible dimming down to 10% for low use and security giving substantial energy savings over conventional HID lamps
- Increased system efficiency by reducing wasted light

#### **Technical Features**

- Controllable via smart devices, touchscreen or wireless switch box
- Mounting height 12-25m
- Mounted and pre-aimed onto a 360° bracket



- 3 phase as standard
- Single phase 230V option available
- · Marine grade as standard
- Die-cast aluminium polyester powder coated body with integrated heat sink and flexible bracket mount
- Lenses installed behind toughened flat glass for maximum integrity of the lenses
- High powered 1.375kW luminaire
- Dimmable in accordance with EN 12193
- · Highly efficient optics

#### **Lighting Distribution**

 360° distribution with beam options 45° / 50° / 55° / 60°

#### **Applications**

- Large area
- · Ports & terminals
- Airports
- Car parks

#### **Colours**

Black

#### **Lighting Control & AL360**

When different zones of a site require full lighting levels and others need to be dimmed at different times through the dark hours, the dimmed zones can be brought back up to full lighting levels instantly for emergencies or to allow maximum dimming duration between working time of the zones. This saves energy, keeps running costs low and increases the level of site security.


# Dimensions in mm 1015 012.50 140 1015



#### **Technical Specifications**

AL360	Minimum	Typical	Maximum
Voltage input (VAC)	370	400	430
Power factor at 20%-100%	0.90	0.98	
Frequency (Hz)	45		60
Standby power (W)		5	
Colour temperature (K)		5200	
Colour rendering index	70	80	
Weight (kg)		28	
Ingress protection		IP66	
Electrical insulation class		T	
Frontal surface		$0.26 C_{w} = 1$	
Expected lifetime at Tamb = 25°C		60000hrs	100000hrs
Power consumption at 100% (W)		1375	1425
Current (A)		(At 400VAC) 3.5	(At 375VAC) 3.9
Operating temperature (°C)	-20		+40
Luminous efficacy (lm / W)	103.3	113.1	140

#### Key features

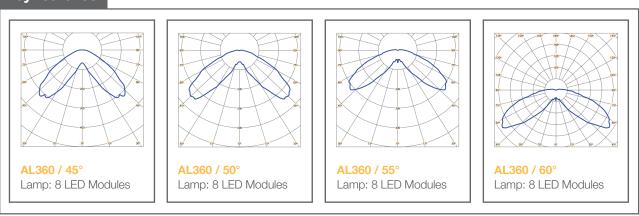

### WS SERIES LED WS100-WS600



#### **Benefits**

- Wireless control simplifies operation for ease of use
- Centrally monitor and adjust power consumption
- Control system enables efficient planning of maintenance
- No re-lamping costs
- Instant startup allows the light to be switched on and off as and when required, thus saving energy costs by reducing power consumption from wasted light
- Flexible dimming down to 10% for low use and security giving substantial energy savings over conventional HID lamps
- Increased system efficiency by reducing wasted light

#### **Technical Features**

- Controllable via smart devices, touchscreen or wireless switch box
- Mounting height 12-45m
- 3 phase as standard
- Single phase 230V option available
- Marine grade as standard
- Die-cast aluminium polyester powder coated body with integrated heat sink and flexible bracket mount

- Lenses installed behind toughened flat glass for maximum integrity of the lenses
- High powered 1.55kW luminaire (WS100 - WS600)
- High powered 0.775kW luminaire (WS400)
- Dimmable in accordance with EN 12193
- Highly efficient optics

#### **Lighting Distribution**

The AAA-LUX WS Series of LED Luminaires offers a variety distribution options to suit individual requirements

#### **Applications**

• Sports

#### **Colours**



Grey

#### Lighting control & WS Series

Using a pitch side control box, smart device, sensors or a computer based in house, individual courts or areas can be switched on and others dimmed or switched off, with the ability to switch lighting to full power instantly to allow for unexpected use or for a maximum energy saving between uses of the sport pitches or courts with little downtime.



AAA-LUX






#### **Technical Specifications**


WS100 - WS600	Minimum	Typical	Maximum
Voltage input (VAC)	370	400	430
Power factor at 20%-100%	0.90	0.98	
Frequency (Hz)	45		60
Standby power (W)		5	
Colour temperature (K)		5200	
Colour rendering index	70	80	
Weight (kg)		28	
Ingress protection		IP66	
Electrical insulation class		1	
Frontal surface		$0.26  \mathrm{C_w} = 1$	
Expected lifetime at Tamb = 25°C		35000hrs	60000hrs
Power consumption at 100%  Standard - Heavy Duty (V  Maximum Power (W)  High Temperature (W)	v)	1550 1700 1375	1600 1750 1425
Current Standard - Heavy Duty (A Maximum Power (A) High Temperature (A)	)	(At 400VAC) 3.9 4.3 2.5	(At 375VAC) 4.3 4.8 3.9
Operating temperature Standard - Heavy Duty (°C) Maximum Power (°C) High Temperature (°C)	C) -20 -20 -20		+40 +50 +50
Luminous efficacy* Standard - Heavy Duty (Ir Maximum Power (Im / W) High Temperature (Im / W	98.7	113.1 109.0 117.2	140 140 140

<sup>\*</sup> Based on the WS2005

#### **Dimensions**

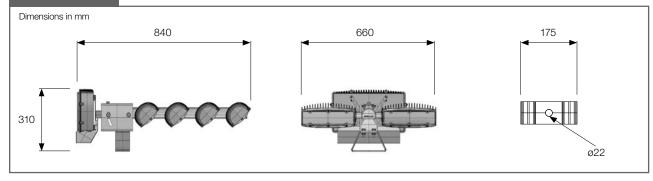


#### **Key features**

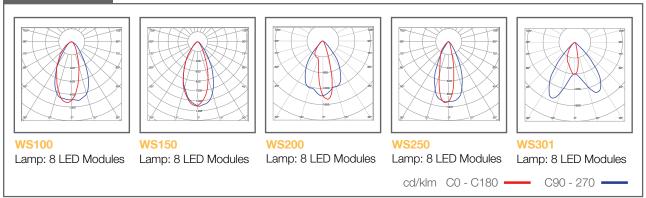


#### **Technical Specifications**

WS400	Minimum	Typical	Maximum
Voltage input (VAC)	370	400	430
Power factor	0.95	0.98	
Frequency (Hz)	45		60
Standby power (W)		7.6	8
Colour temperature (K)		5200	
Colour rendering index	70	80	
Weight (kg)		19	
Ingress protection		IP65	
Electrical insulation class		I	
Frontal surface		$0.26 C_{w} = 1$	
Expected lifetime at Tamb = 25°C		35000hrs	60000hrs
Power consumption at 100%  Standard - Heavy Duty (W)  Maximum Power (W)  High Temperature (W)		775 850 700	800 875 735
Current Standard - Heavy Duty (A) Maximum Power (A) High Temperature (A)		(At 400VAC) 2.0 2.1 1.8	(At 370VAC) 2.2 2.4 2.0
Operating temperature** Standard - Heavy Duty (°C) Maximum Power (°C) High Temperature (°C)	-20 -20 -20		40 30 50
Luminous efficacy* Standard - Heavy Duty (lm / W) Maximum Power (lm / W) High Temperature (lm / W)	103.3 98.7 114.1	113.1 109.0 117.2	140 140 140

\*Luminous efficacy WS400 \*\*Absolute maximum temperature 60°C; auto dimming may occur at high temperatures

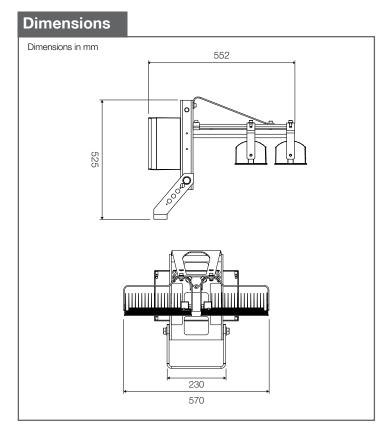

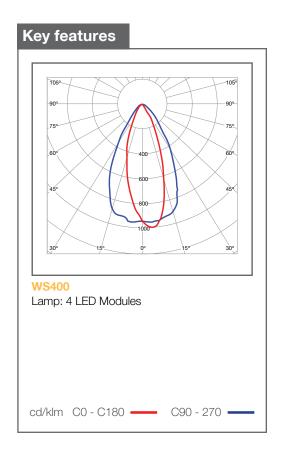

#### **FLOODLIGHTING**

# RS SERIES LED WS1005-WS6005



Lighting a sporting venue can be a challenge with residents living in close proximity.

The AAA-LUX RS Floodlight delivers unrivalled LED lighting on the field, with extreme low spill light for neighbouring houses. Councils, sports clubs and residents living close by agree the RS truly delivers the best of both worlds.



- Increased game experience, with improved visibility on the field, players and ball
- Reduction of stray light
- No start up time needed
- Can be retrofitted on to exisiting masts
- No extra installation costs or cables
- Flexible and easy to control
- Adjustable power consumption
- Dimming options which can be controlled remotely
- No re-lamping costs





#### **Key Technical Features**

- Superior colour rendering
- Improved uniformity
- Central monitoring and control
- Direct connection to 400 VAC

#### Accessories

- · Light spill shield
- Aiming visor

#### **Applications**


• Sports

#### Colours



Grey




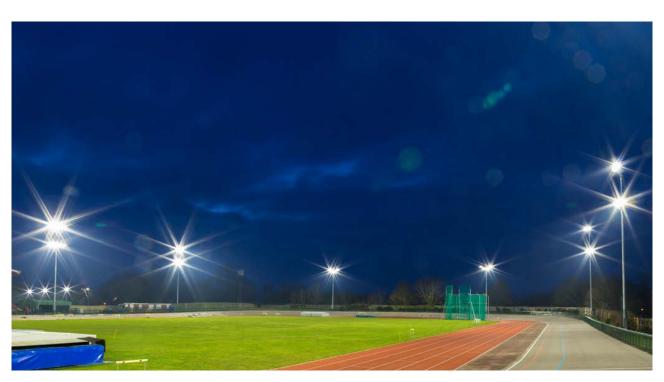

#### **Technical Specifications**

WS1005 - WS6005	Minimum	Typical	Maximum
Voltage input (VAC)	370	400*	430
Colour temperature (K)		5200	
Colour rendering index	70	75	
Weight (kg)		22	
Ingress protection		IP66	
Expected lifetime at Tamb = 25°C	35000 hrs	60000hrs	
Luminous flux (lm)		181980	
Luminous efficacy (lm/W)	110		
Power consumption (W)		1550	1600
Current (A)		3.9	4.3

<sup>\* 230</sup>Vac available on request

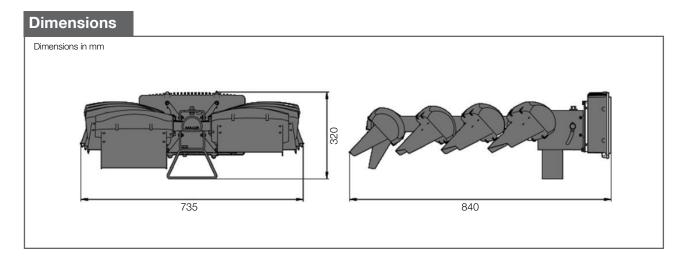



WS200RS calculated intensity vs. distance from mast at 15 $^{\circ}$  tilt (standard)

#### **Definitions**

#### Standard:

STD luminaires are designed for an average ambient temperature of 30°C. The STD can handle high temperatures up to 40°C although it is recommended to switch to the HT version when, during normal operating hours, the ambient temperature is regularly above 30°C in combination with still winds.

#### Maximum power:

Product is optimised for maximum luminous flux (lm) instead of optimal efficacy (lm/W) and cannot be combined with High Temperature option.

#### High temperature:

Product is designed for high temperature environments and cannot be combined with Maximum Power option.

#### Lifetime:

Can only be assured when the system prohibits the luminaires working during daytime (not designed to operate in full sun load)

- All sensitive bolts, nuts, washers and mounting clips are made of Stainless Steel
- Light sources are made of corrosion resistant aluminum with low copper content


#### Luminaire technical information and dimming-power


The Gen6 products are available with various beams to accommodate different areas, mast heights and sports fields. For better light spill control, luminaires can be equipped with light spill caps.

#### Luminaire technical information and dimming-power

	Luminaire Type					
	Standard	Maximum Power	High Temperature			
WS1005	152,615	159,729	142,472			
WS1505	152,615	159,729	142,472			
WS2005	160,665	168,589	149,774			
WS2205	159,515	167,323	148,731			
WS2305	159,515	167,323	148,731			
WS2505	160,665	168,589	149,774			
WS3005	159,515	167,323	148,731			
WS4005	73,308	79,865	71,236			
WS6005	152,615	159,729	142,472			

Luminous flux in Im per lamp type based on DEKRA LM-79 measurement





## STAD SERIES LED



The AAA-LUX WS-STAD series family of floodlights are a true retrofit for existing 2 kW Metal Halide (2.2 kW power dissipation) floodlights. The white light produced by the luminaire gives a daylight perception, which enhances play at all levels.

The Lighting Control Management System (LCMS) can wirelessly switch and dim the luminaires via the proprietary LEDxLINK protocol. In the absence of a LCMS, the luminaires switch on at full power.



#### **Benefits**

- Lightest weight on the market at 22kg
- 5 Year (20,000 hours) warranty as standard for LED and driver
- Hardened scratch resistan glass
- Class A LED's driven at max. 60%:
- Efficiency > 160lm/W
- High uniformity
- Stainless steel fastenings
- Anti-corrosion double coated aluminimum body

#### **Driver Features**

- Class A capacitors with long lifetime
- IP65/66 glands oriented downwards
- High efficiency >95%
- High power factor >0.9 from 20-100%
- No in-rush current
  - No voltage peak
  - Reduces total power requirement
  - Reduced costs
- Automatic temperature protection.
   Protects against over / under voltage.
   Surge protection 6,000v

#### **Accessories**


- Light spill shield
- Aiming visor

#### **Applications**

Sports

#### **Colours**



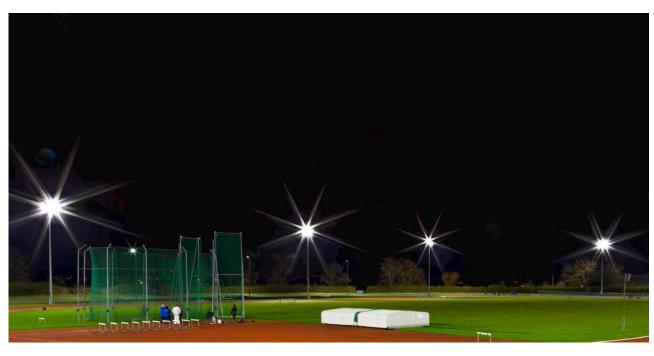



#### **Technical Specifications**


WS1005 - WS6005	Minimum	Typical	Maximum
Voltage input (VAC)	370	400*	430
Colour temperature (K)		5200	
Colour rendering index	70	80	
Weight (kg)		22	
Ingress protection		IP65	
Expected lifetime at Tamb = 25°C		35000 hrs	60000hrs
Luminous efficacy (lm/W)	96.4	105.8	159.9
Power factor (K)	0.95	0.98	
Frequency (Hz)	45		60
Electrical insulation class		1	
Frontal surface (tilt) (m²)		0.17(15°)Cw=1	
Operating temperature (°C)	-20		
Power consumption at 100% (W) MP version		1550 1700	1650
Current (A)		4.0 4.3	4.5 5.0

<sup>\* 230</sup>Vac available on request

# Dimensions Dimensions in mm 840 660 660 022

The AAA-LUX Gen.6 is tested according to ANSI/UL1598 ISTM (In Situ Temperature Measurement. The built-in temperature protection dims the luminaire automatically, based on the ambient temperature. The graph below shows the maximum luminous output for the

different products per ambient temperature and wind still weather conditions. When the product is already dimmed with the LCMS control system, the temperature protection dims only when this dim level is lower than the set dim level.

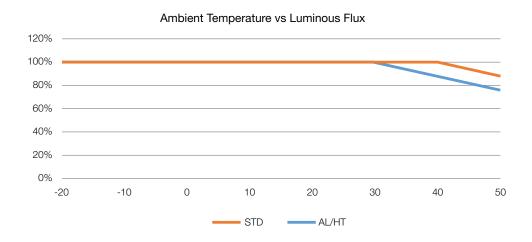

#### **Definitions**

#### Standard:

STD luminaires are designed for an average ambient temperature of 30°C. The STD can handle high temperatures up to 40°C although it is recommended to switch to the HT version when, during normal operating hours, the ambient temperature is regularly above 30°C in combination with still winds.

#### Maximum power:

Product is optimised for maximum luminous flux (Im) instead of optimal efficacy (Im/W) and cannot be combined with High Temperature option.

#### High temperature:

Product is designed for high temperature environments and cannot be combined with Maximum Power option.

#### Lifetime:

Can only be assured when the system prohibits the luminaires working during daytime (not designed to operate in full sun load)

- All sensitive bolts, nuts, washers and mounting clips are made of Stainless Steel
- Light sources are made of corrosion resistant aluminum with low copper content


#### Luminaire technical information and dimming-power


The Gen6 products are available with various beams to accommodate different areas, mast heights and sports fields. For better light spill control, luminaires can be equipped with light spill caps.

#### Delivered lumen output and power consumption

Туре	Flux (LM)	MP Type	Flux (LM)
WS-STAD-01-03	157,777	WS-STAD-01-03	156,912
WS-STAD-02-03	157,777	WS-STAD-01-03	156,912

Luminous flux in Im per lamp type based on DEKRA LM-79 measurement







## **CHALLENGER® SERIES**

#### THE RANGE THAT MEETS ANY CHALLENGE

#### **PRODUCT**

Our Challenger® product range is a serious contender for any floodlighting application. From stadia to grassroots pitches, industrial applications to golf courses, these products deliver superior floodlighting every time.

Specifically designed to meet any requirement, the series starts with the high performance Challenger® 1 for side-lit applications, moves on to the roof mounted Challenger® 2 and finishes with the mighty Challenger® 3 for larger stadia projects.


#### **BENEFITS:**


Here are just some of the Challenger® Series' features

- Effective obtrusive light control
- Precision aiming for superior results
- GORE™ membrane breather system for optimal performance
- Sturdy toughened glass and pressure die-cast bodies for longer outdoor life

Whatever your floodlighting needs the Challenger® series and our additional floodlighting products, AAA-LUX, Vela, Trent and Mura are sure to perform.

Abacus floodlighting for all architectural, security, utility and sports applications.

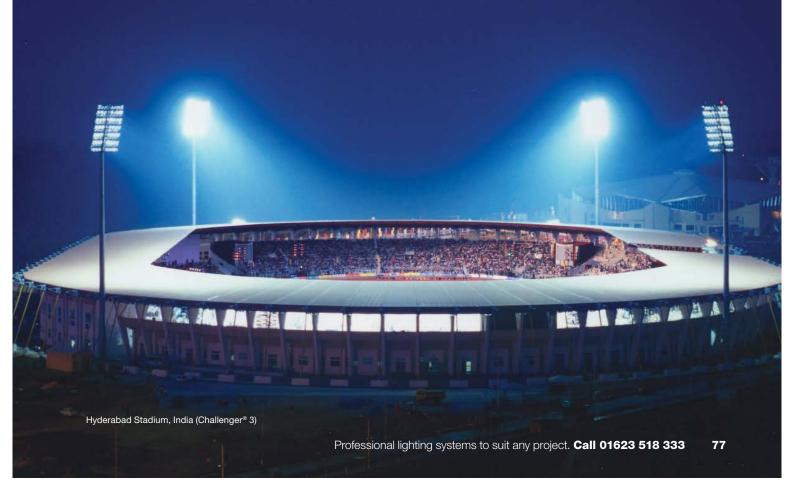

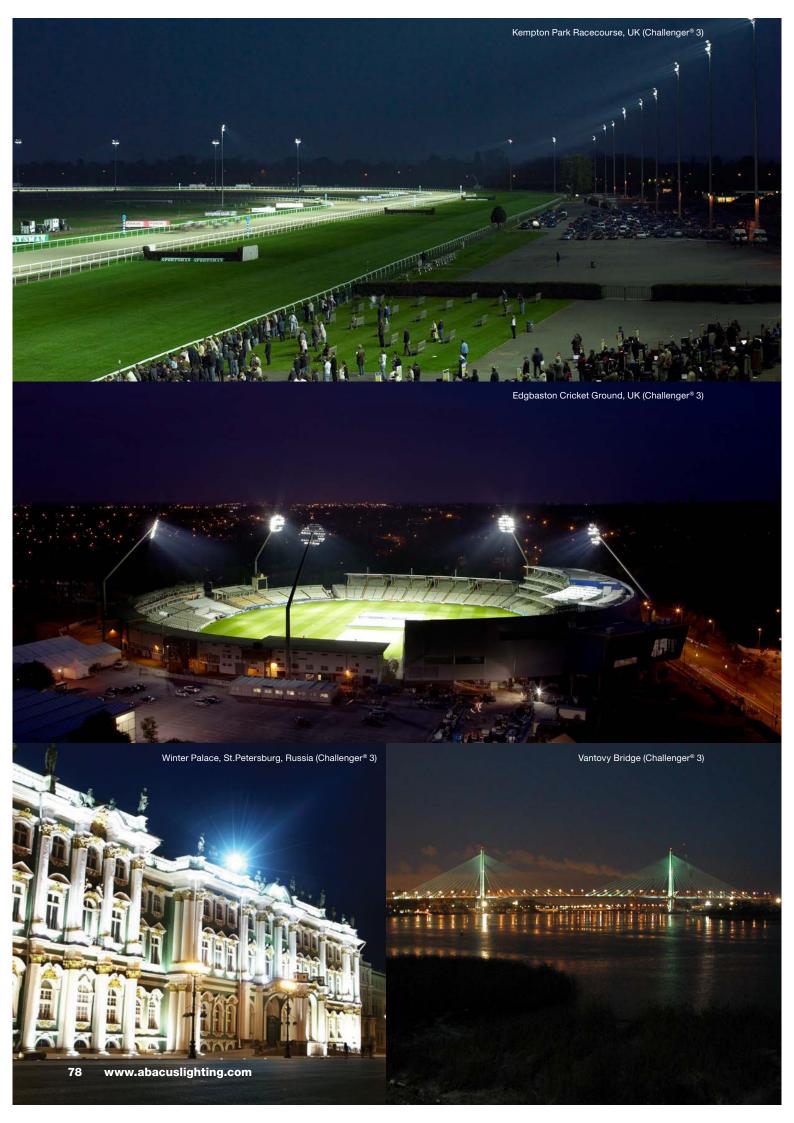

#### **FLOODLIGHTING**

# CHALLENGER® 1 AL6000









#### **Benefits**

- Reduced light overspill and glare with excellent forward throw of light
- Multiple options for effective light distribution as the adjustable lamp holder offers three variations of peak beam elevation
- Dark skies friendly fitting ideal for projects nearby residential areas with specific light regulations, with low light pollution ULOR 0%
- Ease of maintenance via two rear doors with no requirement for tools

#### **Technical Features**

- High powered lamp capabilities 1kW / 2kW metal halide
- 1000W and 2000W MHN-LA & MHN-FC 2200W, MH-TS2000W/XL, HQI-TS2000WNL
- High pressure die-cast aluminium type EN AC 43400
- Stainless steel clamps and fixings
- 6mm galvanised steel mounting bracket with M20 bolt hole

- 4mm tempered, low iron, high transmission glass
- IP66, IK08 ratings, CE
- Available in double asymmetric: narrow, medium and wide beam distributions
- 60° peak beam elevation as standard on all beam widths
- High purity, polished and anodised aluminium reflector system
- Lamp holder support can be adjusted for 55° and 65° peak beam elevation capabilities as standard
- Upward Light Output Ratio (ULOR):
   0% at 60° peak beam elevation

- Low light pollution resulting in a dark skies friendly lantern
- Front, rear and side cowl available
- Electrical connection box: (IP66)
  housing containing the ignitor and the
  power connection, located on the
  side of the stirrup
- Fitted with 2 x GORE™ membrane breathers for floodlight air pressure regulation
- Toolless lamp access via two rear doors, secured with hand operated latches

#### **Applications**

Sport




#### **Technical Specifications**

(kW) Type Manufacturer	Weight (kg)
AL6001 2.2 Narrow MHN-FC/B Philips MHN-FC2.2KW400V	//640 21.4
AL6002 2.2 Medium MHN-FC/B Philips MHN-FC2.2KW400V	//640 21.4
AL6003 2.2 Wide MHN-FC/B Philips MHN-FC2.2KW400V	//640 21.4
AL6004 2 Narrow MHN-LA Philips MHN-LA2KW400V/8	342 21.4
AL6005 2 Medium MHN-LA Philips MHN-LA2KW400V/8	342 21.4
AL6006 2 Wide MHN-LA Philips MHN-LA2KW400V/8	342 21.4
AL6007 2 Narrow HQI-TS/N/L Osram HQI-TS2000WNL	21.4
AL6008 2 Medium HQI-TS/N/L Osram HQI-TS2000WNL	21.4
AL6009 2 Wide HQI-TS/N/L Osram HQI-TS2000WNL	21.4
AL6010 1 Narrow MHN-FC Philips MHN-FC1KW230V/7	740 21.4
AL6011 1 Medium MHN-FC Philips MHN-FC1KW230V/7	740 21.4
AL6012 1 Wide MHN-FC Philips MHN-FC1KW230V/7	<sup>7</sup> 40 21.4
AL6013 2 Narrow MH-TS 2kW/XL Venture MH-TS2000W/XL/K1	12/745 21.4
AL6014 2 Medium MH-TS 2kW/XL Venture MH-TS2000W/XL/K1	12/745 21.4
AL6015 2 Wide MH-TS 2kW/XL Venture MH-TS2000W/XL/K1	12/745 21.4
<b>AL6016</b> 1 Narrow MHN-LA 842 Philips MHN-LA1KW230V/8-	21.4
<b>AL6017</b> 1 Medium MHN-LA 842 Philips MHN-LA1KW230V/8-	21.4
AL6018 1 Wide MHN-LA 842 Philips MHN-LA1KW230V/8-	21.4
<b>AL6019</b> 1 Narrow MHN-LA 956 Philips MHN-LA1KW230V/98	21.4
AL6020 1 Medium MHN-LA 956 Philips MHN-LA1KW230V/98	21.4
<b>AL6021</b> 1 Wide MHN-LA 956 Philips MHN-LA1KW230V/98	21.4
AL6022 2 Narrow MHN-LA 956 Philips MHN-LA2KW400V/9	956 21.4
AL6023 2 Medium MHN-LA 956 Philips MHN-LA2KW400V/9	956 21.4
AL6024 2 Wide MHN-LA 956 Philips MHN-LA2KW400V/9	956 21.4
Lamp Manufacturer & Wattage Colour RA Lamp Lumen Current Supply Lamp Reference (kW) Temp. (K) Output (Initial Im) (A) Voltage (V	Total Circuit /) Power (W)
Venture	
MH-TS2000W/XL/K12/745 2 4500 65 240000 10.3 380/400/4	415 2280
Philips	
MHN-FC2.2kW400V/640 2.2 4100 60 232000 11.0 380/400/4	
MHN-LA2KW400V/842 2 4100 80 220000 9.6 380/400/4	
MHN-LA2KW400V/956 2 5600 90 190000 10.3 380/400/4	
MHN-LA1KW230V/842 1 4200 70 95800 9.3 230/240	1140
MHN-LA1KW230V/956 1 5600 80 87000 9.3 230/240	1140
MHN-FC2KW400V/740 2 4200 60 210000 19.11 380/400/4	
MHN-FC1KW230V/740 1 4100 65 93000 8.9 230/240	1140
Osram           HQI-TS2000WNL         2         4100         65         230000         10.4         380/400/4	415 2280


Technical information may alter dependent on control gear used


### Lamp references



#### **Dimensions**

#### Dimensions in mm





#### Mounting:


Stirrup mounted using M20 fixing. Stirrup adjustment +/- 140°

Weight: 21.4kg.

#### Front wind area:

@60° setting (Flat Glass) - 0.126m² 70° max setting (+10 elevation) - 0.135m². Side wind area: 0.108m²

#### **Maintenance**



Easy Maintenance:


Access to the lamp by means of opening the rear door

#### **Key features**

#### **Abacus Light Control System**


Efficient, careful lighting design has given Abacus an international reputation for combining powerful, sharp illumination with low light pollution.

Abacus' Lighting Control System – exclusive to the Challenger® 1 – features a series of complementary technologies to help achieve this.





## Double Asymmetric Reflector


The double asymmetric reflector is designed to better concentrate and focus the light produced by each lantern. By emitting the main beam at an angle of 55, 60 or 65 degrees from the normal to the front glass, it results in a flat appearance (right), making less of the reflector visible to spectators as well minimising glare.




#### **Photometry**









Narrow 55°




Narrow 60°




Narrow 65°




Medium 55°



Medium 60°



Medium 65°



Wide 60°

Wide 65°

# CHALLENGER® 3 AL5900



#### **Benefits**

 The Challenger® 3 delivers an optically precise symmetrical beam specifically designed and suited to stadium floodlighting requirements

#### **Technical Features**


- Body of high pressure die-cast aluminium, finished in light grey (RAL7035), polyester powder coating
- Reflector system of high purity, polished and anodised aluminium.
   Incorporating an internal baffle to improve efficiency and reduce glare
- Toughened front glass, secured by cast aluminium front frame
- Galvanised steel stirrup, with additional elevation locking screws
- Electrical connection box (IP66) housing ignitor, located on side of stirrup, fitted with 2 x Gore™ membrane breathers



- Designed to accept double ended, short arc 2kW or 1kW metal halide lamps
- Dual provision on side of floodlight body to attach gun sight aiming device to allow accurate beam alignment (AL5931)
- Easy access for re-lamping via opening of the rear cover. Positive closure via large stainless steel catch

#### **Options**

- Half concentric louvre (AL5921) or single blade visor (AL5922) to reduce light pollution.
- Gun sight aiming kit, incorporating gun sight and bracket (AL5931)

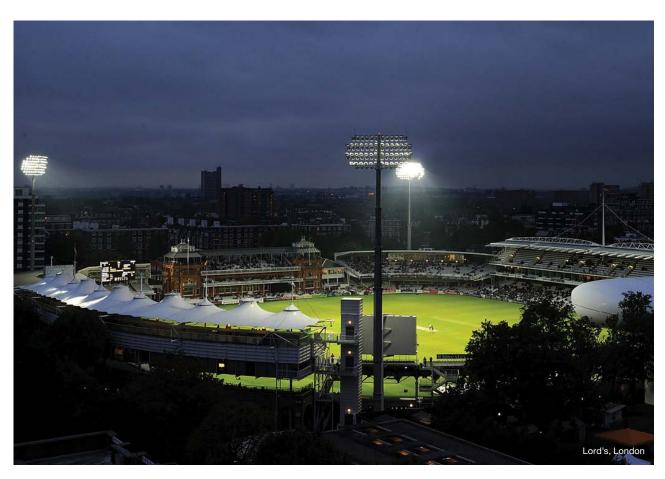




#### **Technical Specifications**

	Beam Type	Lamp: Manufacturer Product Code	Lamp Manufacturer	Lamp: Abacus Product Code	Lamp Holder
AL5901	Narrow	2kW: HQI-TS 2000WDS	Osram	LPW2000M/D	K12s-7 cable
AL5902	Medium	2kW: HQI-TS 2000WDS	Osram	LPW2000M/D	K12s-7 cable
AL5903	Wide	2kW: HQI-TS 2000WDS	Osram	LPW2000M/D	K12s-7 cable
AL5904	Narrow	1kW: HQI-TS 1000WDS	Osram	LPW1000MB/L	K12s-7 cable
AL5905	Medium	1kW: HQI-TS 1000WDS	Osram	LPW1000MB/L	K12s-7 cable
AL5906	Wide	1kW: HQI-TS 1000WDS	Osram	LPW1000MB/L	K12s-7 cable
AL5907	Narrow	MHN-SA 2KW 400V /956	Philips	LPP2000MHN-SA	XW UNP
AL5908	Medium	MHN-SA 2KW 400V /956	Philips	LPP2000MHN-SA	XW UNP
AL5909	Wide	MHN-SA 2KW 400V /956	Philips	LPP2000MHN-SA	XW UNP
AL5910	Extra Narrow	MHN-SA 2KW 400V /956	Philips	LPP2000MHN-SA	XW UNP
AL5911	Narrow	MHN-SB/HO 2KW 400V /956	Philips	LPP2000MHN-SB	K12s-7 WH UNP
AL5912	Medium	MHN-SB/HO 2KW 400V /956	Philips	LPP2000MHN-SB	K12s-7 WH UNP
AL5913	Wide	MHN-SB/HO 2KW 400V /956	Philips	LPP2000MHN-SB	K12s-7 WH UNP
AL5914	Extra Narrow	MHN-SB/HO 2KW 400V /956	Philips	LPP2000MHN-SB	K12s-7 WH UNP
ELECTRO	NIC CONTROI	L GEAR AVAILABLE			

Please request when quoting and ordering.

#### Lamp references

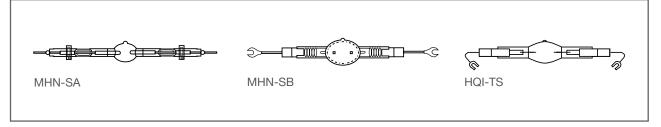


Lamp Manufacturer & Lamp Reference	Lamp Wattage (kW)	Colour Temp. (K)	RA	Lamp Lumen Output (Initial Im)	Lamp Current (A)	Supply Voltage (V)	Total Circuit Power (W)
Philips MHN-SB 2000W/956	2	5600	90	200000	11.5	380/400/415	2136
Philips MHN-SB/HO 2000W/956	2	5600	90	220000	11.5	380/400/415	2136
MHN-SA 2000W/956	2	5600	90	200000	11.3	380/400/415	2136
Osram HQI-TS2000/D/S	2	5900	93	200000	11.5*	380/400/415	2105
HQI-TS1000/D/S	1	5900	90	90000	9.4	380/400/415	1140

<sup>\*</sup>Measured on a 10.3A ballast.


Technical information may alter dependent on control gear used

#### **Dimensions**



Mounting:
Stirrup mounted using M20 fixing

Stirrup adjustment +/- 140° No baffle in extra narrow version




**Weight:** 15kg. **Front wind area:** 0.196m<sup>2</sup> at 70° elevation

#### Maintenance




**Easy Maintenance:**Access to the lamp by means of opening the rear door


#### **Accessories**



Single blade louvre – AL5922 This accessory for the Challenger® 2 & 3 minimises upward light while maintaining good vertical lighting levels on the playing field



Half concentric louvre – AL5921 This accessory for the Challenger® 3 provides the highest level of upward light and overspill control




Aiming tool kit – AL5931
Set of equipment and instructions to enable the Challenger® 2 & 3 to be aimed with pinpoint accuracy to a specific point on the design area. Allows the highest level of control over the aiming and commissioning part of a floodlighting project




Challenger® 3 with louvres

#### **Key features**




ALUSIO

MHN-SA Pro 2kW Narrow beam




AL5912

MHN-SB Pro 2kW Medium beam



AL5913

MHN-SB Pro 2kW Wide beam



AL5914

MHN-SB Pro 2kW Extra narrow beam

#### FLOODLIGHTING

## VAGO SERIES AL61101





#### **Benefits**

- Durable die cast aluminium housing
- 160° rotation allows for a variety of mounting options

#### **Technical Features**

- CRI >70
- Colour temperature 4,000K
- Controls; DALI, 1:10V (optional)
- Protection against overheating
- Surge protection:
  - 2kV / 4kV (13-50W models)
  - 10kV / 6kV (73-400W models)

#### **Applications**


- Sport
- Architectural








#### **Dimensions**

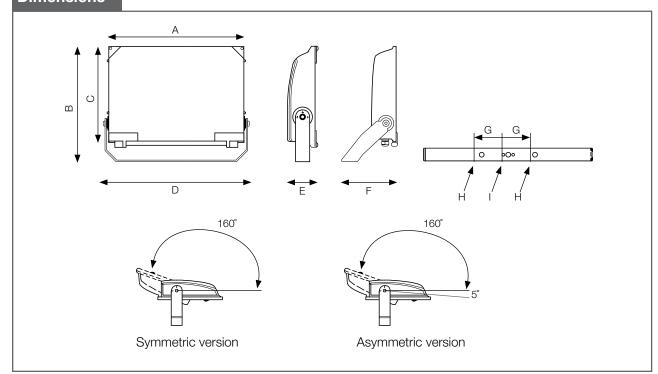


All dimensions in mm	А	В	С	D	Е	F	G	Н	I
AL61101/1 - AL61101/8	183	234	180	193	60	-	50	ø10.5	ø10.5
AL61101/9 - AL61101/12	223	277	220	233	64	-	50	ø10.5	ø10.5
AL61101/13 - AL61101/28	324	381	300	348	92	-	75	ø11	ø15
AL61101/29 - AL61101/34	384	381	300	408	92	-	75	ø11	ø15
AL61101/35 - AL61101/38	454	381	300	478	92	-	75	ø11	ø15
AL61101/39 - AL61101/46	606	481	400	633	92	205	70	ø13	ø15
AL61101/47 - AL61101/50	606	481	400	633	92	205	70	ø13	ø15

#### **Photometry**

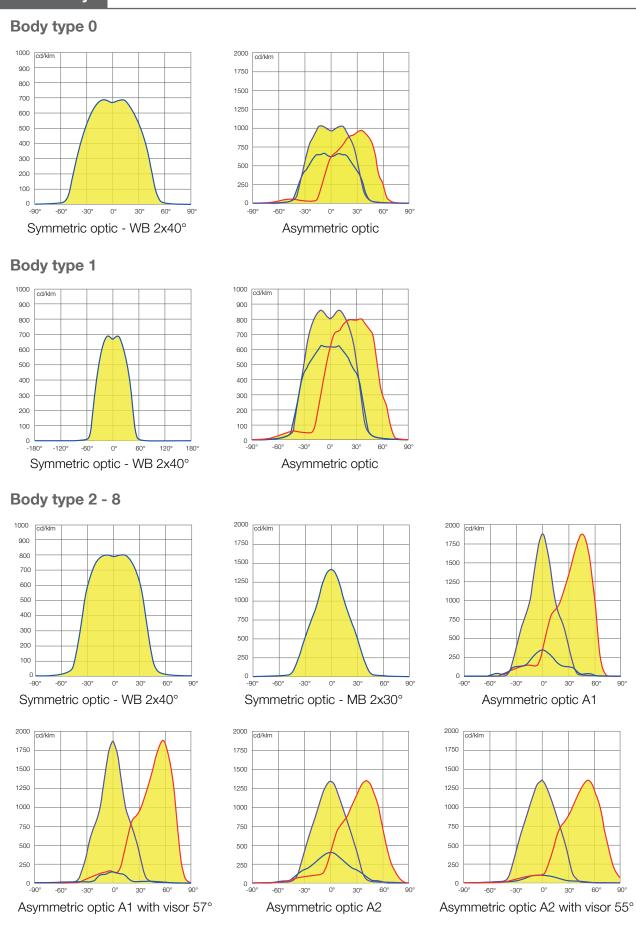

Photometric data measured according to UNI EN 13032-1 and IES LM 79-08

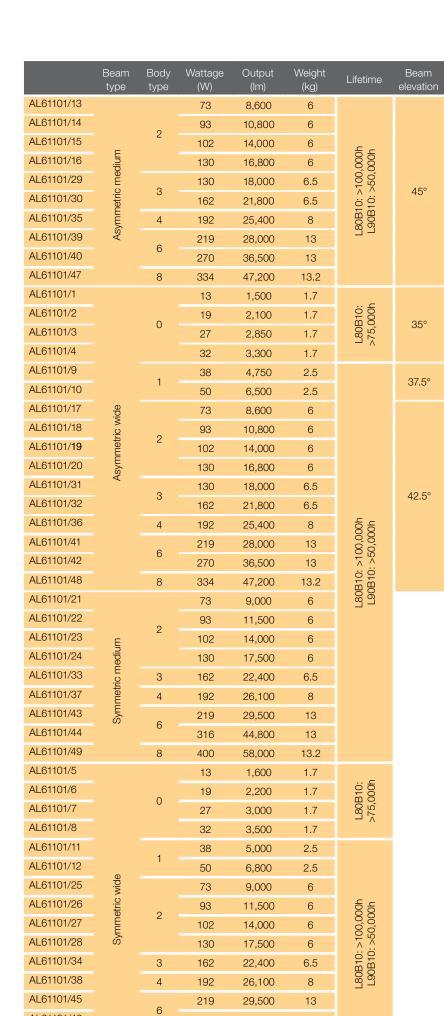

316

400

8

44,800

58,000

13

13.2

AL61101/46

AL61101/50

Wind exposed surface (m²)						
Body			Tilt °			
type		0	45	90		
0	Lateral	0.011	0.011	0.011		
U	Front	0.009	0.027	0.035		
1	Lateral	0.014	0.014	0.014		
'	Front	0.012	0.040	0.050		
2	Lateral	0.028	0.028	0.028		
2	Front	0.024	0.081	0.102		
3	Lateral	0.028	0.028	0.028		
3	Front	0.028	0.096	0.121		
4	Lateral	0.028	0.028	0.028		
7	Front	0.033	0.113	0.143		
6	Lateral	0.028	0.028	0.028		
O	Front	0.076	0.194	0.253		
8	Lateral	0.028	0.028	0.028		
0	Front	0.076	0.194	0.253		

# F-LUM SERIES AL60900





An outdoor fixture used to illuminate medium sized areas. Available in a wide range of lumen output options and various symmetric and asymmetric beam angles. Featuring a die cast aluminium housing with cooling fins, long lifetime and high system efficiency.

#### **Benefits**

- Low maintenance
- · Easy to mount
- · Detachable driver
- Durable die cast aluminium housing
- Optics to suit all applications

#### **Technical Features**

- IP66 and IK08 rated
- Efficacy up to 150lm/W
- CRI >70
- Colour temperature 5,000K
- Surge protection 10kV/10kA
- Controls; Dali, 0-10V
- · Protection against overheating





#### **Applications**

- Sport
- Amenity
- Industrial
- Airport / Port


#### **Accessories**

- Precision aiming device
- Light spill shield
- Wireguard protection

#### Colours




## Dimensions

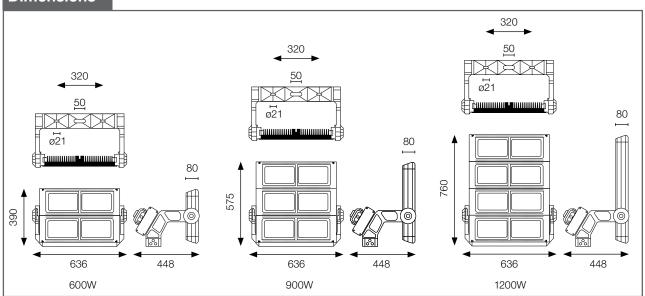

All dimensions in mm



## Optics

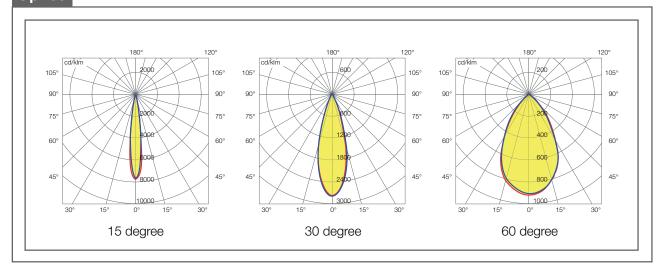

		F-LUM			
System efficacy	Up to 150 lm/W				
Supply voltage		220-240 VAC			
Power	600W	900W	1200W		
Luminous flux	Up to 90,000 lm	Up to 135,000 lm	Up to 180,000 lm		
Weight	22.5kg	29.5kg	35.5kg		
Power factor		> 0.95			
Lifetime L70B10	> 60,000 h				
CCT	5,000K (others available)				
CRI		> 70			
Ingress protection	IP66				
Mechanical strength	IK08				
Surge protection options	10	kV / 10kA (optional 20kV / 20k	:A)		
Operating temperature	-30°c to +50°c				
Colour	Matt grey				
Housing material	Aluminium				
Remote control options	DALI, 0-10V				
Warranty		5 years on electronics			

	Power (W)	Luminous flux (lm)*	Beam angle	Efficacy (Im/W)
AL60901/600	600	78,000	15°	130
AL60901/900	900	117,000	15°	130
AL60901/1200	1200	156,000	15°	130
AL60902/600	600	90,000	30°	150
AL60902/900	900	135,000	30°	150
AL60902/1200	1200	180,000	30°	150
AL60903/600	600	90,000	60°	150
AL60903/900	900	135,000	60°	150
AL60903/1200	1200	180,000	60°	150

<sup>\*</sup>Luminous flux is valid for CCT 5,000K.

#### **FLOODLIGHTING**

# F-LUM MIDI AL60700





A mid-sized outdoor fixture used to illuminate medium sized areas. Available in a wide range of lumen output options and various symetric and asymetric beam angles. Featuring a die cast aluminium housing with cooling fins, long lifetime and high system efficiency.

#### **Benefits**

- Low maintenance
- Easy to mount
- Durable die cast aluminium housing
- Compact size and lightweight

#### **Technical Features**

- IP66 and IK08 rated
- Efficacy up to 144lm/W
- CRI >70
- Colour temperature 4,000 5,000K
- Surge protection 10kV
- Controls; Dali, 0-10V
- Protection against overheating

# Applications


- Road
- Amenity
- Open area
- Sport

#### **Colours**





#### **Dimensions**

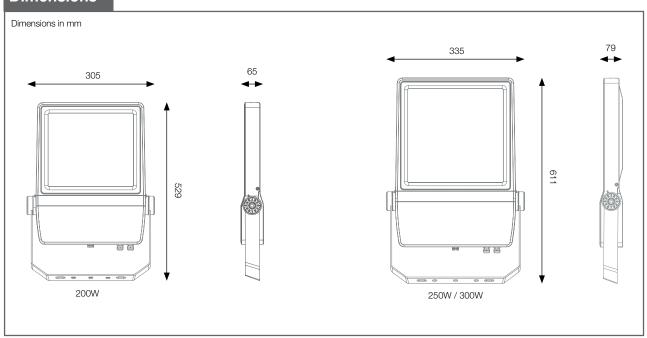




	F-LUM Midi					
System efficacy	Up to 144 lm/W					
Supply voltage		220-240 VAC				
Power	200W	250W	300W			
Luminous flux	Up to 28,400 lm	Up to 36,000 lm	Up to 42,300 lm			
Weight	5.9kg	7.2kg	7.2kg			
Power factor		> 0.95				
Lifetime L70B10	> 50,000 h					
CCT	4,000K, 5,000K					
CRI		> 70				
Ingress protection		IP66				
Mechanical strength		IK08				
Surge protection options		10 kV				
Operating temperature	-30°c to +50°c					
Colour	Aluminium grey					
Housing material	Aluminium, PC					
Remote control options	DALI, 0-10V					
Warranty		5 years on electronics				

	Power (W)	Luminous flux (lm)*	Beam angle	Efficacy (lm/W)
AL60701/200	200	26,400	45°	132
AL60701/250	250	33,000	45°	132
AL60701/300	300	39,000	45°	130
AL60702/200	200	26,600	60°	133
AL60702/250	250	34,000	60°	136
AL60702/300	300	40,800	60°	136
AL60703/200	200	28,400	110°	142
AL60703/250	250	36,000	110°	144
AL60703/300	300	42,300	110°	141

<sup>\*</sup>Luminous flux is valid for CCT 4,000K.

## Optics

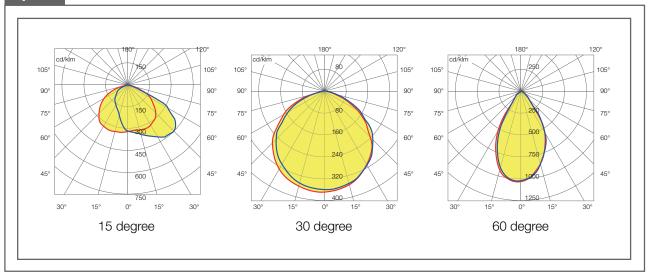





A compact outdoor fixture used to illuminate small areas. Available in a wide range of lumen output options. Featuring a compact design and light weight, whilst maintaining excellent heat dissipation properties.

#### **Benefits**

- Low maintenance
- Easy to mount
- Durable die cast aluminium housing
- Compact size and lightweight

#### **Technical Features**

- IP65 and IK08 rated
- Efficacy up to 132lm/W
- CRI >70
- Colour temperature 4,000K 5,000K
- Surge protection 10kV
- Controls; Dali, 0-10V
- Protection against overheating





#### **Applications**


- Road
- Amenity
- Open area

#### **Colours**



Grey

#### **Dimensions**

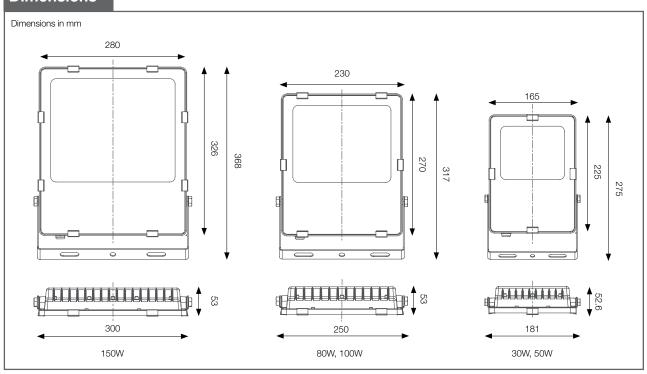




		F-LUM Mini					
System efficacy							
Supply voltage		220-240 VAC					
Power	30W - 50W	80W - 100W	150W				
Luminous flux	3,960 - 6,550 lm	10,480 - 13,200 lm	Up to 19,650 lm				
Weight	1.2kg	2.2kg	3kg				
Power factor	> 0.90						
Lifetime L70B10	> 50,000 h						
CCT	4,000K, 5,000K						
CRI	> 70						
Ingress protection		IP65					
Mechanical strength		IK08					
Surge protection options		10 kV					
Operating temperature		-20°c to +50°c					
Colour		Matt black					
Housing material	Aluminium, PC						
Remote control options	DALI, 0-10V						
Warranty		5 years on electronics					

	Power (W)	Luminous flux (lm)*	Efficacy (lm/W)
AL60801/30	30	3,960	132
AL60801/50	50	6,550	131
AL60801/80	80	10,480	131
AL60801/100	100	13,200	132
AL60801/150	150	19,650	131

<sup>\*</sup>Luminous flux is valid for CCT 4,000K.

## Optics

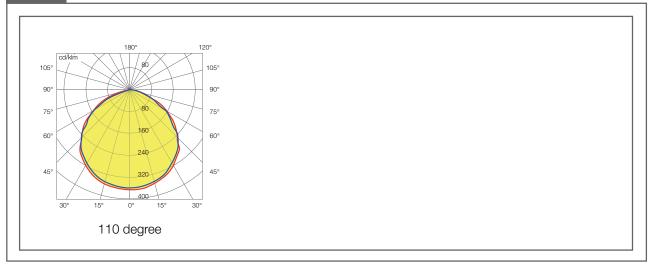

## TRENT 2 LED AL5500







#### **Benefits**

- Maximum glare control allows for mounting indoors or at lower height to avoid glare for site users
- Aesthetic styling suitable for architectural and commercial locations

#### **Technical Features**

- IP66 and IK08 rated
- Class I as standard, Class II available on select ranges upon request
- Class I has surge protection fitted, up to 10kV protection
- Body 4 & 5 consist of a symmetrical distribution with 3 beam widths
- Body 8 & 9 consist of street lighting optics
- Multiple wattages available in all versions
- Programmable drivers on selected versions
- Die-cast aluminium and front frame, degreased and phosphor chromate treated with surface protection coat & polyester powder coating
- Double goniometric scale for ease of vertical aiming on site for body styles 4 & 5
- Tempered glass with high temperature thermal shock resistance, mechanically fixed into the frame
- Pressure compensation filter on the body
- High efficiency metalised polycarbonate vacuum formed reflectors
- Power correction factor >0.90
- Stirrup for bodies 4 & 5
- 60 or 76mm diameter post mount for bodies 8 & 9
- Access options: Hexagon stainless steel screws, or tool-less access by stainless steel securing clip. State on order
- Bodies 4 & 5 come with Multichip Philips Luxeon M LEDs
- Bodies 8 & 9 come with Luxeon T e or Cree XM-L2 LEDs



Symmetrical Small body 4 Low-medium lumen output



Symmetrical Large body 5 Medium-high lumen output




Cosmo Option - Asymmetric



Cosmo Option - Symmetric





 Photobiological Risk Group exempt based on EN 62471



#### **Applications**


• Area • Sport


#### Colour





#### **Dimensions**

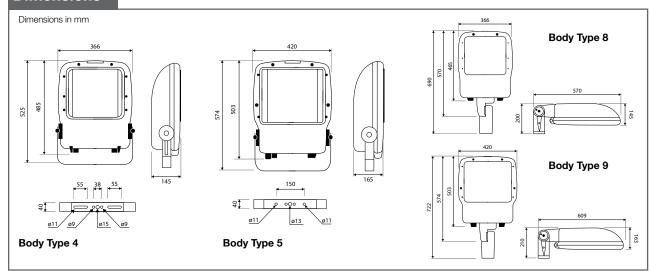

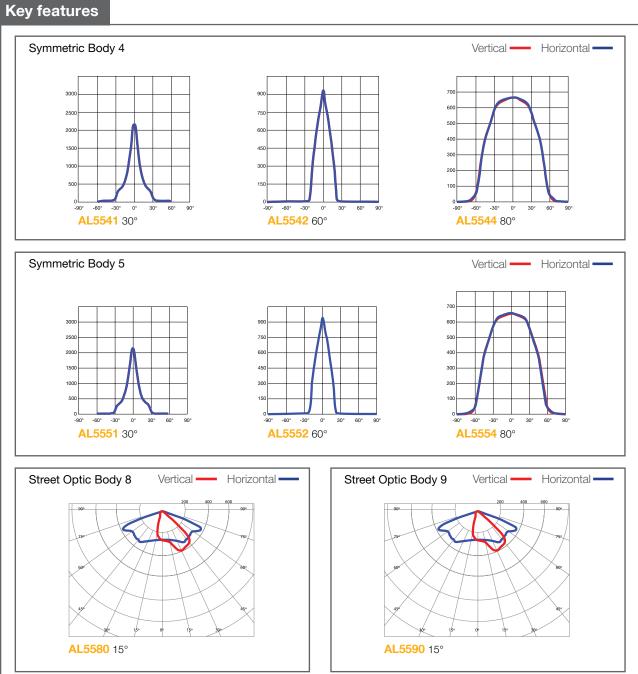

#### **Technical Specifications**

	Wattage (W) Includes Driver	No. of LEDs	Nominal Lumen Output (lm)	Lumen Output (Im)	L80 Hours (TA=25°)	CCT & CRI	Fixed Current Driver	Prog. Driver	Running Current (mA)	Beam Width	Body Type	Weight (kg)	Wind Area (m²)
	60	9	8350	7390	>70000		Υ	N	530	30°	4	11.3	0.077
AL5541	78	12	10930	9670	>70000	4000K / >70 CRI	Υ	N	530	30°	4	11.3	0.077
	100	16	14200	12600	>65000	, , o o,	Υ	N	530	30°	4	11.3	0.077
	60	9	8350	7390	>70000		Υ	N	530	60°	4	11.3	0.077
AL5542	78	12	10930	9670	>70000	4000K / >70 CRI	Υ	N	530	60°	4	11.3	0.077
	100	16	14200	12600	>65000		Υ	N	530	60°	4	11.3	0.077
	60	9	8350	7390	>70000	4000177	Υ	N	530	80°	4	11.3	0.077
AL5544	78	12	10930	9670	>70000	4000K / >70 CRI	Υ	N	530	80°	4	11.3	0.077
	100	16	14200	12600	>65000		Υ	N	530	80°	4	11.3	0.077
AL5551	134	16	17740	15700	>60000	4000K/	Υ	N	700	30°	5	11.4	0.087
ALJJJI	144	20	19430	17200	>60000	>70 CRI	N	Υ	600	30°	5	11.4	0.087
AL5552	134	16	17740	15700	>60000	4000K/	Υ	N	700	60°	5	11.4	0.087
ALJJJZ	144	20	19430	17200	>60000	>70 CRI	N	Υ	600	60°	5	11.4	0.087
AL5554	134	16	17740	15700	>60000	4000K/	Υ	N	700	80°	5	11.4	0.087
AL3334	144	20	19430	17200	>60000	>70 CRI	N	Υ	600	80°	5	11.4	0.087
LIGHT D	LIGHT DISTRIBUTION TYPE: Symmetric												

**MOUNT:** Stirrup

	Wattage (W) Includes Driver	No. of LEDs	Nominal Lumen Output (lm)	Lumen Output (Im)	L80 Hours (TA=25°)	CCT & CRI	Fixed Current Driver	Prog. Driver	Running Current (mA)	Body Type	Weight Spigot (kg)	Weight Wall Mount (kg)	Wind Area (m²)
	52	24	6540	5700	>70000		Υ	N	700	8	9.68	10.83	0.083
AL5580	65	30	8150	7100	>70000	4000K/	Υ	N	700	8	9.68	10.83	0.083
ALOGOO	79 36 9460 8250	>65000	>70 CRI	Υ	N	700	8	10.68	11.83	0.083			
	91	42	10980	9580	>65000		Υ	N	700	8	10.68	11.83	0.083
	106	49	13200	11100	>70000		Υ	N	700	9	13.0	14.25	0.112
AL5590	120	56	16510	130	>70000	4000K / >70 CRI	Υ	N	700	9	13.0	14.25	0.112
	134	42	17500	15650	>70000	- >/0 CRI	N	Υ	1000	9	13.0	14.25	0.112

**LIGHT DISTRIBUTION TYPE:** Street Optic

**MOUNT:** Spigot or wall mount

	Wattage (W) Includes Driver	No. of LED COB	Nominal Lumen Output (lm)	Lumen Output (lm)	CCT & CRI	Prog. Driver	Optic	Distribution	Body Type	Weight (kg)	Wind Area (m²)
AL5591	110	2	19700	14250		Υ	Wide 2 x 34°		4	11.3	0.0494
AL5592	110	2	19700	14250		Υ	Spot 2 x 20°		4	11.3	0.0494
AL5593	124	3	25000	18000		Υ	Wide 2 x 34°	Cummatria	4	11.3	0.0494
AL5594	124	3	25000	18000		Υ	Spot 2 x 20°	Symmetric	4	11.3	0.0494
AL5595	178	5	35700	26500	4000K />70	Υ	Wide 2 x 34°		5	13.35	0.0494
AL5596	178	5	35700	26500	CRI	Υ	Spot 2 x 20°		5	13.35	0.0494
AL5597	98	2	17200	12700		Υ	Maximum intensity 36°		4	11.3	0.0494
AL5598	117	3	22100	16400		Υ	Maximum intensity 36°	Asymmetric	4	11.3	0.0494
AL5599	145	4	26700	19850		Υ	Maximum intensity 36°	Asymmetric	5	13.35	0.0494
AL5600	154	5	29200	21650		Υ	Maximum intensity 36°		5	13.35	0.0494

**LIGHT DISTRIBUTION TYPE:** Cosmo Optic

**MOUNT:** Stirrup

#### **FLOODLIGHTING**

## TRENT 2 LED AL5500 DOUBLE ASYMMETRIC







#### **Benefits**

- Maximum glare control allows for mounting indoors or at lower height to avoid glare for site users
- Aesthetic styling suitable for architectural and commercial locations
- Reduces maintenance risks with a knife switch to interrupt the power feed upon opening

#### **Technical Features**

- IP66 and IK08 rated
- Class I as standard, protected against surges upto 10kV
- Asymmetrical lighting distribution
- Available in four distribution angles
- Available in two body sizes
- Multiple wattages available in the 16 LED and 20 LED versions
- Programmable drivers on selected versions
- Die-cast aluminium body and front frame in polyester powder coating
- Galvanized steel bracket
- Extra clear 4mm thick tempered glass
- Power correction factor >0.90
- Philips LUMILEDS LUXEON M MULTICHIP LEDs









Body 4 12 LED

Body 5 16 LED

- Mounted on a pressed aluminium circuit, highly heat dissipating Metal Core Printed Circuit Board
- Compliant with EN 60598-1 and EN 60598-2-5
- Photobiological Risk Group exempt based on EN 62471

#### **Applications**

- Area
- Sport

#### Colour








Body 5 20 LED

#### **Dimensions**

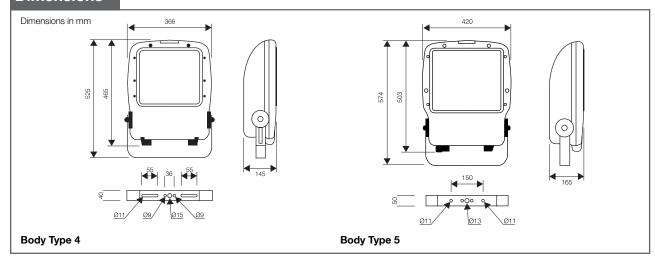


#### **Technical Specifications**

11.3 0.077
11.3 0.077
11.3 0.077
11.3 0.077
14.4 0.087
14.4 0.087
14.4 0.087
14.4 0.087
14.4 0.087
14.4 0.087
14.4 0.087
14.4 0.087

**LIGHT DISTRIBUTION TYPE:** Double Asymmetric

**MOUNT:** Stirrup

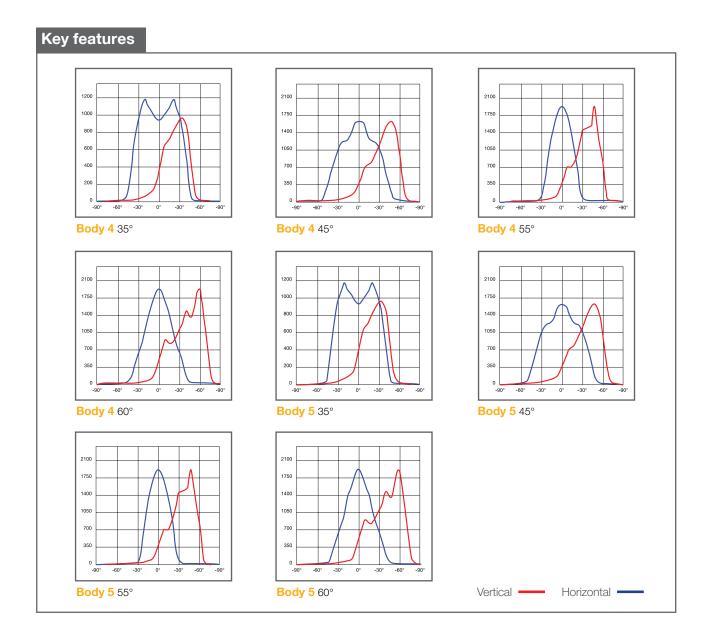



## **MURA 2 LED** AL5300



#### **Benefits**

- Design of optics gives maximum glare control and visual comfort for use at lower levels or in sporting applications where low height or indoor areas are to be lit
- Vertical orientation indicator allows for ease of elevating allowing for adaptability and quick adjustment to be undertaken during installation and maintenance

#### **Technical Features**

- IP67 and IK08 rated
- Class I
- RGB LED version with four pre-programmed light scenes with 12 variations available and light intensity dimming to 25%, 50% and 75%. A master unit controls up to 30 slave units to programme scenes by remote control
- Die-cast aluminium body and front frame
- Galvanised and painted steel bracket with vertical orientation indicator with stainless steel external screws
- Power correction factor >0.90
- · Anti-ageing silicon rubber gasket

- Extra clear tempered 4mm thick glass sealed to the front cover
- Standard LED and RGB versions available, multiple wattages available in two body sizes
- Available in symmetrical or asymmetrical light distributions
- High efficiency metalised polycarbonate vacuum formed reflectors (none RGB version)
- LED types are mounted on a pressed aluminium circuit, highly heat dissipating Metal Core Printed Circuit Board
- Surge protection fitted, up to 6kV protection, option of 10kV
- Photobiological Risk Group exempt based on EN 62471

#### **Applications**

• Area

#### Colour

Light grey




Body Type 6 Standard LED



Body Type 7 Standard LED





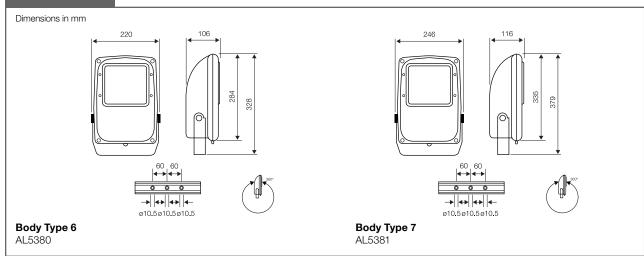

	Wattage (W) Includes Driver	No. of LEDs	Nominal Lumen Output (lm)	Lumen Output (Im)	L80 Hours (TA=25°)	CCT & CRI	Fixed Current Driver	Prog. Driver	Running Current (mA)	Beam Width	Body Type	Weight (kg)	Wind Area (m²)
AL5380	27	12	3300	2570	>65000	4000K/	N	Υ	700	2 x 40°	6	3.95	0.056
AL5360	36	16	4420	3380	>65000	>70 CRI	N	Υ	700	Symmetrical	6	3.95	0.056
	42	25	5330	4150	>65000	4000K/	Υ	N	530	2 x 40°	7	4.75	0.075
	54	25	6700	5200	>65000 >70 CRI	Υ	N	700	Symmetrical	7	4.75	0.075	
AL5381	42	36	Dependen	t on Colour	>50000	RGB	N	Υ	530	2 x 30° Symmetrical	7	4.75	0.075
	42	36	Config	juration	>50000	ПОВ	N	Υ	530	2 x 40° Symmetrical	7	4.75	0.075
AL5382	27	12	3380	2640	>65000		Υ	N	700		6	3.95	0.056
AL5383	36	16	4520	3520	>65000	4000K / >70 CRI	Υ	N	700	30° Asymmetrical	7	4.75	0.075
ALJJOJ	45	20	5500	4300	>65000		Υ	N	700	,	7	4.75	0.075

**LIGHT DISTRIBUTION TYPE:** Symmetrical (AL5380, AL5381), Asymmetrical (AL5382, AL5383) **MOUNT:** Stirrup

#### **FLOODLIGHTING**

# **VELA LED** AL7000



#### **Benefits**

- Ease of maintenance and replacement of parts due to the modular construction
- Effective light control and low light output ratio (ULOR) with the design of the outer body and canopy

#### **Technical Features**

- Various wattages available: 200W, 400W, 600W
- 250W driver (IP67)
- Colour temperature: 5000K
- CRI: 70
- Cree / Philips Lumileds
- Single phase 230V
- Single plug and play high quality connector for power and controls
- Running current: 700mA
- Lumens per watt circa 102.5+lm / W
- 1-10V dimming available as standard
- Five distribution types available: narrow, medium, wide, extra narrow and extra wide




- Low upward light output ratio (ULOR)
- Die-cast aluminium black LED modules
- 3mm sheet aluminium outer body
- Polyester power coated body as standard, finished silver (RAL 9006)
- Mounting bracket options: under slung or over slung
- Modular construction

#### **Applications**

- Area
- Sport

#### Colour



#### **Technical Specifications**

	Wattage (W)	Lumen Output (lm)	No. of LED Modules	No. of LEDs	Beam Distribution	Efficacy	Drivers (W)	Effective Projection Area	Weight (kg)
AL7001	396	42059	2	48	Narrow	106.2	2 x 250 (On the fitting)	0.328	27
AL7002	396	41428	2	48	Medium	104.6	2 x 250 (On the fitting)	0.328	27
AL7003	394	40787	2	48	Wide	103.5	2 x 250 (On the fitting)	0.328	27
AL7004	609	64957	3	72	Narrow	106.7	3 x 250 (Remote)	0.23	31.4
AL7005	609	63008	3	72	Medium	103.5	3 x 250 (Remote)	0.23	31.4
AL7006	609	61118	3	72	Wide	100.4	3 x 250 (Remote)	0.23	31.4
AL7007	196	20516	1	24	Wide	104.6	1 x 250 (On the fitting)	0.246	16
AL7008	396	44036	2	48	Extra Narrow	111.2	2 x 250 (On the fitting)	0.328	27
AL7009	332	33567	2	48	Extra Wide	103.9	2 x 250 (On the fitting)	0.328	27

# **AMENITY LIGHTING**

Amenity lighting is used to enhance and provide a safe night environment for the benefit of local residents, pedestrians, car park and road users.

It covers a wide range of general applications and purposes:

- To improve night time visual attractiveness and surroundings for residents and visitors
- To allow safer movement of pedestrians in the outdoor environment
- To offer outdoor car park users the appropriate level of lighting to balance the requirements of security, comfort and visibility
- To provide security lighting for local properties by deterring or revealing intruders
- To discourage violence, vandalism and crime by providing less concealment and allowing visual recognition of people within the night scene
- To provide low level general lighting of access roads, low traffic residential roadways and footpaths
- To provide the appropriate level of lighting for the level of security risk, be it low, medium or high

These requirements may usually be achieved by introducing relatively low lighting levels dependent, however, upon the overall purpose and degree of attractiveness desired. High levels of illuminance uniformity are usually unnecessary.

It is more important to ensure that minimum illuminance values are achieved in order to allow safe movement of pedestrians. The minimum values are determined in the relevant categories. The lighting of roadways should comply with the relevant code of practice or standard.

Increasing illuminance levels will also improve visual performance and instill in the pedestrian the psychological effect of increased safety, providing glare is controlled. Surround ratios of road and footpath illuminance against the illuminance of the surrounding area are governed by British and European standards (BE 5489-1 and BS EN 13201-2).


In the night environment a poorly designed lighting installation may produce lighting pollution. This can cause serious adverse effects, both physiological and ecological, in both urban and rural areas.

There are three distinct areas of light pollution: Overspill, Glare and Sky Glow.

The objective for the lighting system should be to limit these to an acceptable level for the location and application by careful design. By controlling obtrusive light, both the lighting quality and performance are increased.

Amenity lighting can create a positive effect. Showing luminaire form may enhance the night time appearance and reflections can also create attractive sparkle. Good amenity lighting should take into consideration all aspects of the lit environment.

Application	Lighting Level	Uniformity						
Safety								
Safe pedestrian movement. Revealing obstacles and scene irregularities	1 Lux (min)							
For safe facial recognition (friend or foe)	5 Lux (ave)							
Outdoor Car Parks (ref: BS 5489-1:2003+	-A2:2008)							
Light traffic: Shop parking areas, housing, cycle parks	5 Lux (ave)	Uo = 0.25						
Medium traffic: Parking at major stores, office buildings, sports and multi-purpose building complexes	10 Lux (ave)	Uo = 0.25						
Heavy traffic: Parking areas at schools, churches, major sports and multi-purpose building complexes	20 Lux (min)	Uo = 0.25						
Open Footbridges, Stairways & Ramps (ref: BS 5489-1:2003+A2:2008)	30 Lux (ave)	Uo = 0.5						
Roadways & Public Amenity areas: (S, C, ME Classes) Please refer to BS 5489-1:2003+A2:2008 & EN								



13201-2:2003 for guidance.



#### LIGHTING GUIDELINES

# **FLOODLIGHTING**

The use of floodlights to illuminate exterior areas has a wide and varied range of applications.

Some typical categories are:

- General lighting
- Working areas
- Security
- Sports

Applications such as lighting for sports, security, airports, docks and the illumination of hostile and hazardous environments often require specialist attention. Our lighting design service is available to advise on these and all other aspects of exterior lighting. You can also refer to the Abacus Sports Lighting Solutions brochure and the Abacus website for detailed information on standards and recommended solutions.

Application	Lighting Level	Uniformity
Safety & Security		
Very low risk: occasional light traffic areas	5 Lux (ave)	Uo = 0.25
Low risk: General lighting – occasional use	10 Lux (ave)	Uo = 0.40
Medium risk: Storage areas with frequent traffic	20 Lux (ave)	Uo = 0.40
High risk: Operational areas requiring high levels of safety	50 Lux (ave)	Uo = 0.40
Industrial Sites & Storage Areas		
Short term handling of large units and raw materials. Loading and unloading of bulk goods	20 Lux (ave)	Uo = 0.25
Continuous handling of large units and raw materials. Loading and unloading of freight; open loading platforms	50 Lux (ave)	Uo = 0.40
Reading documents; using tools	100 Lux (ave)	Uo = 0.50
Demanding work; machine operation, inspection	200 Lux (ave)	Uo = 0.50
General Circulation Areas		
Pedestrian walkways	5 Lux (ave)	Uo = 0.25
Slow moving traffic areas	10 Lux (ave)	Uo = 0.40
Regular traffic areas	20 Lux (ave)	Uo = 0.40
Pedestrian use, turning vehicles, loading and unloading points	50 Lux (ave)	Uo = 0.40
Please refer to BS EN 12464-2:2007 or 0	CIE S 015E:200	05

These are guidelines only

for a wider range of application guidance

#### General and working areas

Most general and working areas are illuminated by floodlights mounted on masts or buildings. The type of floodlight, lamp selection and mounting height are dependent upon the overall size of the area, illuminance level, visual task, site restrictions and the cost effectiveness of the overall design.

#### Calculations

All general exterior lighting calculations will include a maintenance factor due to depreciation caused by various elements. Where a 'Maintained Illuminance Level' is required, it is necessary to incorporate a full maintenance factor comprising all depreciation factors:

- 1. Depreciation due to build-up of dirt on a luminaire
- 2. Lamp lumen depreciation
- 3. Lamp survival
- 4. Deterioration of internal reflecting surfaces
- 5. Atmospheric losses

The use of a 'Maintained Illuminance' should ensure the specified illuminance level is always provided during the period to planned maintenance. It is of particular importance in specifications for sports lighting.





#### **COLUMNS & MASTS**

We design, manufacture and install a variety of columns and masts. Base-hinged and fixed columns, and the widest range of high mast systems – even unique telescopic masts. Whatever your requirements, we'll either have a product in our range or we can design one for you.

#### Standard columns

Abacus manufactures and supplies a wide range of standard columns in tubular, octagonal and conical styles, often in a choice of galvanised steel or aluminium. We also offer a variety of brackets designed to accommodate most standard luminaires, as well as a bespoke service, tailoring columns and brackets to specific requirements for your project.

A range of three architecturally styled columns, type LoCone, HiCone and Classic, are available with complementary brackets. A shield-shaped flush door enhances its appeal for amenity and architectural applications.

You can also enhance the appearance and longevity of your products with a wide range of paint finishes and surface protections; from standard finishes to specialist options such as marine and anti-graffiti protection.



## **High mast systems**

Whether you need a mast for lighting a port or stadium, road junction or industrial facility, we have the right product for you. Choose from fixed masts, base-hinged or raising and lowering winch masts. We also manufacture masts for telecoms, wind turbines, CCTV, signage and a whole host of other uses, not related to lighting.

## **Telescopic masts**

Our latest innovation is the unique telescopic mast system, perfect for addressing planning issues.

These masts can be raised using the latest touchscreen technology and are installed in some of the world's most iconic sports stadia.

## PAINT SHOP FACILITY

#### **COLUMN FINISHING & PROTECTION OPTIONS**

Abacus offers a wide range of paint finishes designed to suit the requirements of our customers. Finishes are applied to the column once the column has been hot dip galvanised in accordance with the British and European standard, EN1461. Download the full list of options from our website.





## **INSTALLATION & MAINTENANCE** FROM THE PROFESSIONALS



## Installation

We are proud to offer a professional turnkey solution, from design through to installation. Our highly skilled installation teams work worldwide across a whole range of industries. We can supply everything from foundations to commissioning, either as a subcontractor or main contractor.

Let us take the worry out of your project by handling it, from start to finish.

## **Maintenance**

At Abacus the great service doesn't stop with installation. Our fully qualified engineers can also offer you a variety of maintenance packages to suit every requirement.

Working at all heights, we will inspect and report on all aspects of your lighting system - including testing your electrical systems and cabling to certify compliance to NICEIC standards. We can also repair and replace key components and develop a tailored maintenance programme to suit your specific project.

Our reputation is built on providing professional and efficient maintenance services for a wide variety of customers. We are also a RISQS approved contractor for work on rail projects.

Our expertise covers all types of industry sectors including:

- Sports lighting systems
- Airport, port and industrial high mast floodlighting
- Retail parks and amenity lighting
- Railway lighting
- All hinged mast systems
- High masts with lowering headframes
- Fixed masts with and without ladders

## Maintenance Elements designed around you

Abacus Maintenance Elements can be applied to a wide variety of applications:

- Sports lighting systems
- · Retail parks & amenity lighting
- Airport, port & industrial high mast floodlighting
- · Railway lighting
- Hinged & fixed masts
- · High masts with lowering headframes
- Fixed masts with & without ladders
- · Anything else? Give us a call





## To find out more about Abacus Maintenance Elements, call +44 (0)1623 518 316 or visit our website, www.abacuslighting.com

















Abacus Lighting Ltd Oddicroft Lane Sutton-in-Ashfield Nottinghamshire NG17 5FT United Kingdom Tel +44 (0)1623 511 111 Fax +44 (0)1623 552 133 Email sales@abacuslighting.com Web www.abacuslighting.com



Conditions of sale
All goods supplied are subject to the company's general conditions of sale which are available on request.

Registered Office: Oddicroft Lane, Sutton-in-Ashfield, Nottinghamshire, NG17 5FT, United Kingdom. Registered in England No. 8494722

Trade Descriptions
All descriptions represent only particulars of the goods to which they apply and do not form part of any contract. The company reserves the right to change specification without prior notification or public announcement.

© Copyright 2020 Abacus Lighting Limited All rights reserved